



Multiple Connector Assemblies

Molded Cable Assemblies

For Distribution Box Applications

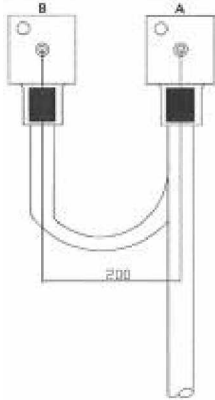

Distance between connectors = 7.9" (200mm)
(Other lengths available upon request).




Standard main cable length = 3.3 Feet (1 Meter)
(Other lengths available upon request)

DIN 43650 A 18mm Dual Ground	Industrial Form B 11mm Ground Up	Industrial Form C 9.4mm Dual Ground	DIN 43650 C 8mm Dual Ground
------------------------------------	--	---	-----------------------------------

Part Numbers


Heads

0 to 250 VAC/DC




Without LED &

12 to 24 VAC/DC



With LED & Suppression

110 to 120 VAC/DC



With LED & Suppression

Heads	DIN 43650 A	Industrial Form B	Industrial Form C	DIN 43650 C
2	CG1-D02-000-C02-1	CM1-D02-000-B02-1	CP2-D02-000-C02-1	CP1-D02-000-C02-1
3	CG1-302-000-C02-1	CM1-302-000-B02-1	CP2-302-000-C02-1	CP1-302-000-C02-1
4	CG1-402-000-C02-1	CM1-402-000-B02-1	CP2-402-000-C02-1	CP1-402-000-C02-1
2	CG1-D02-VL1-C02-1	CM1-D02-VL1-B02-1	CP2-D02-VL1-C02-1	CP1-D02-VL1-C02-1
3	CG1-302-VL1-C02-1	CM1-302-VL1-B02-1	CP2-302-VL1-C02-1	CP1-302-VL1-C02-1
4	CG1-402-VL1-C02-1	CM1-402-VL1-B02-1	CP2-402-VL1-C02-1	CP1-402-VL1-C02-1
2	CG1-D02-VL2-C02-1	CM1-D02-VL2-B02-1	CP2-D02-VL2-C02-1	CP1-D02-VL2-C02-1
3	CG1-302-VL2-C02-1	CM1-302-VL2-B02-1	CP2-302-VL2-C02-1	CP1-302-VL2-C02-1
4	CG1-402-VL2-C02-1	CM1-402-VL2-B02-1	CP2-402-VL2-C02-1	CP1-402-VL2-C02-1

Technical Information

Connection Voltage	As Listed in Drawing	Cable Type	HO5VVF or HO3VVF
Nominal Power	3A	Jacket Material	Black PVC
Test Voltage	250VAC - 300 VDC max.	Conductor Size	18/3 or 20/3
Insulation Group	VDC 0110 1/89 Class C	Conductor Color	Brn, Blue, (Blk), Grn/Yel
Clamping Voltage 24V	34V	Nominal Cable OD	6.7mm
Clamping Voltage 110V	185V	Bend Radius	10 X Cable OD
Connector Material	Glass Reinforced Polypropylene	Center Screw	Depending on Connector
Protection Rating	IP 65; IP 67 on Request	Temperature Range	-2° to +176° F
Contact Resistance	≤ 4 mΩ		

To locate additional product specifications and technical drawings go to www.asi-ez.com