


ASI Relay Modules

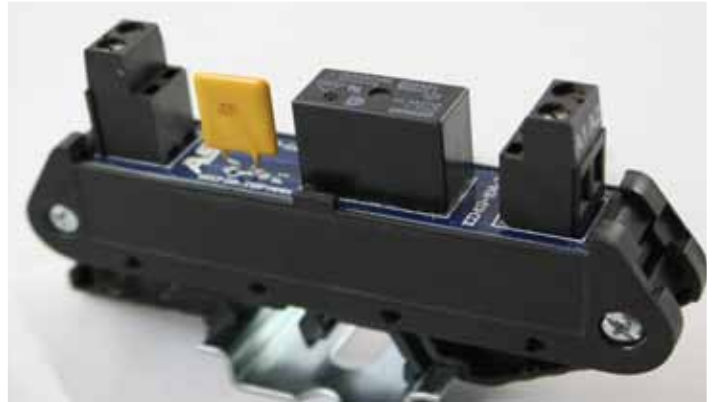

Features:

- SPST, NC Relay
- Low Cost
- DIN Rail Mount
- Compact Design
- 24VDC Coil
- 30 Volt, PTC Resettable Fuse Protection

ORDERING INFORMATION

Order Number	14093
Type	IMRL024PTC

COIL RATINGS

Rated voltage	24Vdc
Rated current	16.7mA
Coil resistance	1440Ω
Power	~ 400 mW

CONTACT TECHNICAL DATA

Contact type	SPST
Contact material	Ag alloy (Cd free)
Rated load	3 A at 30 VDC (NC)
Impulse withstand voltage	8 kV (1.2 x 50 μs)
Pull in time	10 ms max
Drop out time	5 ms max
Failure rate	10 mA at 5 VDC
Ambient operating temp	-40°C to 85°C

ACCESSORIES

	PART #:	PKG QTY:
End Stop (snap-on)	ASIUD1B	25
DIN Rail		
7.5 x 35mm slotted	PR005	1
7.5 x 35mm non-slotted	PR003	1
15 x 35mm slotted	PR006	1
15 x 35mm non-slotted	PR007	1