

COMPRESSION CABLE GLANDS

Polyamide PA6

1700T



Material: POLYAMIDE PA6
self-extinguishing class VO (UL 94)
Temperature range:
-20°C to +90°C (continuous)
Protection: IP 54
Colour: RAL 7035 light grey,
RAL 9005 black


Compression cable glands

special Internal blanking disc: PVC 50 sh

Pg thread DIN 40 430 - Dimensions DIN 46 320

Ref. Light Grey	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B1 Spanner (mm)	B2 Spanner (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
* 1700T	Pg 9	15,5	6,5 - 8,5	17	20	8	19-22	200/100
* 1701T	Pg11	19	8 -10	19	22	8	21-25	100/100
* 1702T	Pg13,5	20,5	8 -11	21	24	9	22-26	100/100

*Add to Ref: N for Black

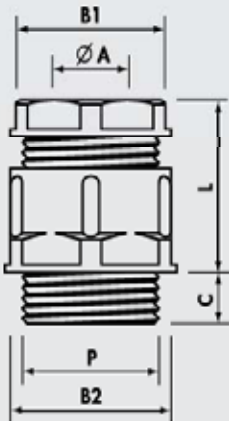

Compression cable gland - reduced cable entry

Sealing ring: CHLOROPRENE, concentric, multi-sector

Pg thread DIN 40 430 - Dimensions DIN 46 320

Ref Light Grey	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B1 Spanner (mm)	B2 Spanner (mm)	C (mm)	L min-max (mm)	Quantity
1702CONC	Pg13.5	20.5	5.5-13	21	24	9	22-26	100

Add to Ref: N for Black