

2900



Material:
NICKEL PLATED BRASS
(CuZn 40 Pb 3)
Sealing-ring: NEOPRENE®
Cable grip insert:
POLYAMIDE PA6.6
O-Ring: NITRILE 70 sh A
(factory fitted)
Protection: IP 68
Temperature range:
-25°C to +100°C (continuous)

MAXIbrass® CABLE GLANDS


Nickel Plated Brass



MAXIbrass® standard

Pg thread DIN 40 430

Ref. Nickel Plated Brass	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity
2900.07N	Pg 7	12.7	3 - 7	16	18	5.0	16-20	100
2900.09N	Pg 9	15.5	4 - 8	17	19	6.0	17-23	100
2900.11N	Pg11	18.8	4.5-10	20	23	6.0	20-25	100
2900.13N	Pg13.5	20.5	5 -12	22	25	6.5	20-26	50
2900.16N	Pg16	22.6	7 -13	24	27	6.5	20-27	50
2900.21N	Pg21	28.5	10 -17	30	33	7.0	24-30	50
2900.29N	Pg29	37.2	17 -25	40	45	8.0	30-37	25
2900.36N	Pg36	47.2	20 -32	50	55	8.0	38-48	10
2900.42N	Pg42	54.2	28 -38	57	63	10.0	39-48	5
2900.48N	Pg48	60.0	34 -45	67	74	15.0	40-52	5

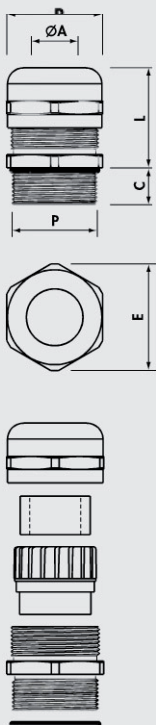

MAXIbrass® reduced cable entry

Pg thread DIN 40 430

Ref. Nickel Plated Brass	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity
2910.07N	Pg 7	12.7	1 - 5	16	18	5.0	16-20	100
2910.09N	Pg 9	15.5	2 - 6	17	19	6.0	17-23	100
2910.11N	Pg11	18.8	2.5- 7	20	23	6.0	20-25	100
2910.13N	Pg13.5	20.5	4 -10	22	25	6.5	20-26	50
2910.16N	Pg16	22.6	5 -10	24	27	6.5	20-27	50
2910.21N	Pg21	28.5	6 -13	30	33	7.0	24-30	50
2910.29N	Pg29	37.2	11 -20	40	45	8.0	30-37	25
2910.36N	Pg36	47.2	18 -26	50	55	8.0	38-48	10
2910.42N	Pg42	54.2	24 -31	57	63	10.0	39-48	5
2910.48N	Pg48	60.0	27 -39	67	74	15.0	40-52	5