


MAXIbrass® CABLE GLANDS

Nickel Plated Brass

2900

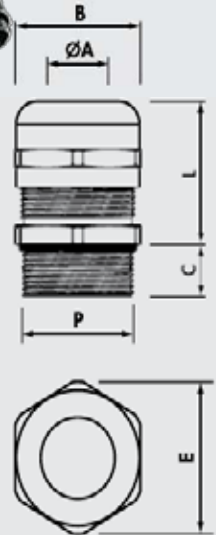

MAXIbrass® extended thread

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Ref. Nickel Plated Brass	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity
2901.M12N	M12X1.5	12.5	3 - 7	16	18	12	16-20	100
2901.M16N	M16X1.5	16.5	4.5-10	20	23	12	20-25	100
2901.M20N	M20X1.5	20.5	7 -13	24	27	12	20-27	50
2901.M25N	M25X1.5	25.5	10 -17	29	32	12	24-30	50
2901.M32N	M32X1.5	32.5	11 -21	36	40	15	27-34	25
2901.M40N	M40X1.5	40.5	19 -28	45	50	15	34-42	10
2901.M50N	M50X1.5	50.5	26 -35	54	60	15	35-43	8

MAXIbrass® extended thread and reduced cable entry

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Ref. Nickel Plated Brass	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity
2911.M12N	M12X1.5	12.5	1 - 5	16	18	12	16-20	100
2911.M16N	M16X1.5	16.5	2.5- 7	20	23	12	20-25	100
2911.M20N	M20X1.5	20.5	5 -10	24	27	12	20-27	50
2911.M25N	M25X1.5	25.5	6 -13	29	32	12	24-30	50
2911.M32N	M32X1.5	32.5	7 -14	36	40	15	27-34	25
2911.M40N	M40X1.5	40.5	13 -23	45	50	15	34-42	10
2911.M50N	M50X1.5	50.5	20 -29	54	60	15	35-43	8

