




7900
7900A



Stainless Steel 303 (X8 CrNiS 18-9)

Stainless Steel 316L (X2 CrNiMo 17-12-2)

Material:
STAINLESS STEEL 303/316L
Sealing-ring: NEOPRENE®
Cable grip insert:
POLIAMMIDE PA6.6
O-Ring: NITRILE 70 sh A
(factory fitted)
Protection: IP 68
Temperature range:
-25°C to +100°C (continuous)

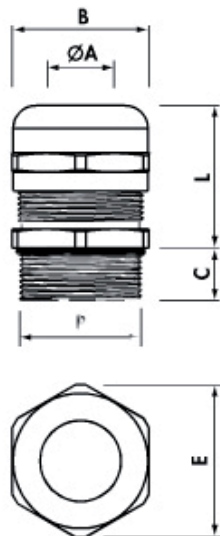

MAXinox *Stainless Steel AISI 303*

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Stainless Steel AISI 303	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
7900.M12	M12x1.5	12.2	3 - 7	16	18	6.5	16-20	90/30
7900.M16	M16x1.5	16.2	4.5-10	20	23	7.0	20-25	120/30
7900.M20	M20x1.5	20.5	7 -13	24	27	8.0	20-27	75/25
7900.M25	M25x1.5	25.4	10 -17	29	32	8.0	24-30	40/20
7900.M32	M32x1.5	32.5	11 -21	36	40	9.0	27-34	15
7900.M40	M40x1.5	40.5	19 -28	45	50	9.0	34-42	15
7900.M50	M50x1.5	50.5	26 -35	54	60	10.0	35-43	10
7900.M63	M63x1.5	64.0	34 -45	67	74	15.0	40-52	5

MAXinox *Stainless Steel AISI 316L*

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Stainless Steel AISI 316L	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity Box/Bag
7900A.M12	M12x1.5	12.2	3 - 7	16	18	6.5	16-20	60/20
7900A.M16	M16x1.5	16.2	4.5-10	20	23	7.0	20-25	80/20
7900A.M20	M20x1.5	20.5	7 -13	24	27	8.0	20-27	60/20
7900A.M25	M25x1.5	25.4	10 -17	29	32	8.0	24-30	30/15
7900A.M32	M32x1.5	32.5	11 -21	36	40	9.0	27-34	12
7900A.M40	M40x1.5	40.5	19 -28	45	50	9.0	34-42	10
7900A.M50	M50x1.5	50.5	26 -35	54	60	10.0	35-43	7
7900A.M63	M63x1.5	64.0	34 -45	67	74	15.0	40-52	5