22mm Push buttons and pilot devices

Plastic series

Push-button operators

8 LP2T B104

8 LP2T B204

8 LP2T B303

Color	Qty per pkg	Catalog number	
Flush (complete with mounting adapter), momentary.			
Black	10	**8 LP2T B102**	
Green	10	**8 LP2T B103**	
Red	10	**8 LP2T B104**	
Blue	10	**8 LP2T B106**	
White	10	**8 LP2T B108**	
Extended (complete with mounting adapter), momentary.			
Black	10	**8 LP2T B202**	
Green	10	**8 LP2T B203**	
Red	10	**8 LP2T B204**	
Blue	10	**8 LP2T B206**	
White	10	**8 LP2T B208**	
Guarded (complete with mounting adapter), momentary.			
Black	10	**8 LP2T B302**	
Green	10	**8 LP2T B303**	
Red	10	**8 LP2T B304**	
Blue	10	**8 LP2T B306**	
White	10	**8 LP2T B308**	

Push-button operators with inscription

8 LP2T B1104

8 LP2T B2104

Inscription	Color	Qty per pkg	Catalog number	
Flush (complete with mounting adapter), momentary.				
O	Black	10	**8 LP2T B1102**	
	Red	10	**8 LP2T B1104**	
I	Green	10	**8 LP2T B1113**	
	White	10	**8 LP2T B1118**	
II	Green	10	**8 LP2T B1123**	
	White	10	**8 LP2T B1128**	
STOP	Black	10	**8 LP2T B1132**	
	Red	10	**8 LP2T B1134**	
← ❶	Black	10	**8 LP2T B1142**	
	White	10	**8 LP2T B1148**	
↑ ❷	Black	10	**8 LP2T B1152**	
	White	10	**8 LP2T B1158**	
START	Green	10	**8 LP2T B1163**	
	White	10	**8 LP2T B1168**	
R	Blue	10	**8 LP2T B1176**	
	White	10	**8 LP2T B1178**	
RESET	Blue	10	**8 LP2T B1196**	
◄┼►	Black	10	**8 LP2T B1502**	
►│◄	Black	10	**8 LP2T B1512**	
Extended (complete with mounting adapter), momentary.				
O	Black	10	**8 LP2T B2102**	
	Red	10	**8 LP2T B2104**	
STOP	Black	10	**8 LP2T B2132**	
	Red	10	**8 LP2T B2134**	

❶ Arrow inscription can be used to indicate right or left.
❷ Arrow inscription can be used to indicate up or down.

Operational characteristics
- Ambient operating temperature: -10 to +140°F (-25 to +60°C)
- Ambient storage temperature: -40 to +160°F (-40 to +70°C)
- Any mounting position is allowed
- Degree of protection: IP65.

Reference standards
Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-5-1.

Materials
Polyamide and polycarbonate.

Mechanical endurance
Operating force: 1.76lb / 0.8 kg (operator).
Mechanical life: 1,000,000 cycles.

Mounting adapter
Standard supply with the operator.
Operators latch onto the mounting adapter with a simple rotation.
The adapter is fixed to the mounting surface by means of incorporated screws (Tmax = 5.3in lb / 0.6 Nm).

Auxiliary contacts
See page 6-17.
Catalog numbers: 8 LM2T C10 (1NO)
8 LM2T CF10 (1NO Faston)
8 LM2T C10A (EM)
8 LM2T C01 (1NC)
8 LM2T CF01 (1NC Faston)
8 LM2T C01D (LB)
Auxiliary contacts snap onto the mounting adapter.
Up to 6 auxiliary contacts can be fitted on the mounting adapter: 2 on the left, 2 at the center and 2 on the right.
To mount the auxiliary contacts in the center position, use the accessory: LM2T A140 (see page 6-21).

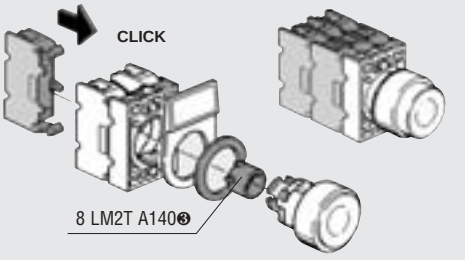

❸ The action plug LM2T A140 for the centre position is not standard supplied and must be purchased separately.

Automation Systems Interconnect, Inc. • P.O. Box 1340 • Mechanicsburg, PA 17055 • Phone (717) 249-5581 or (877) 650-5160 • Fax (717) 249-5542