

Features

Input


- Input Signal: 4-20mA

Output

- Output Signal: 4-20mA
- Load Resistance: $RL \leq (U_i - 6) / 0.02$

Technical Data

- Power Supply: 20-30 Vdc \pm 10%
- Output Accuracy (20° C): 0.2%F.S
- Temperature Drift (-20~+60°C): 0.01%F.S./10°C
- Response Time: \leq 5ms
- Insulation Strength: 1500 Vac; 1 min
- Insulation Resistance: \geq 100M Ω
- Electromagnetic Compatibility: GB/T 18268 (IEC 61326-1)
- Environment Temperature: -20°~+60°C

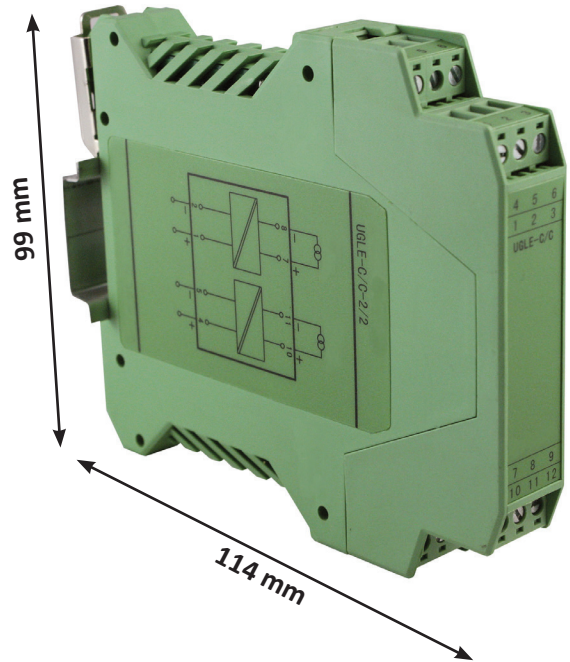

Dimensions

- W/T/H: 99 X 17.5 X 114 mm

