
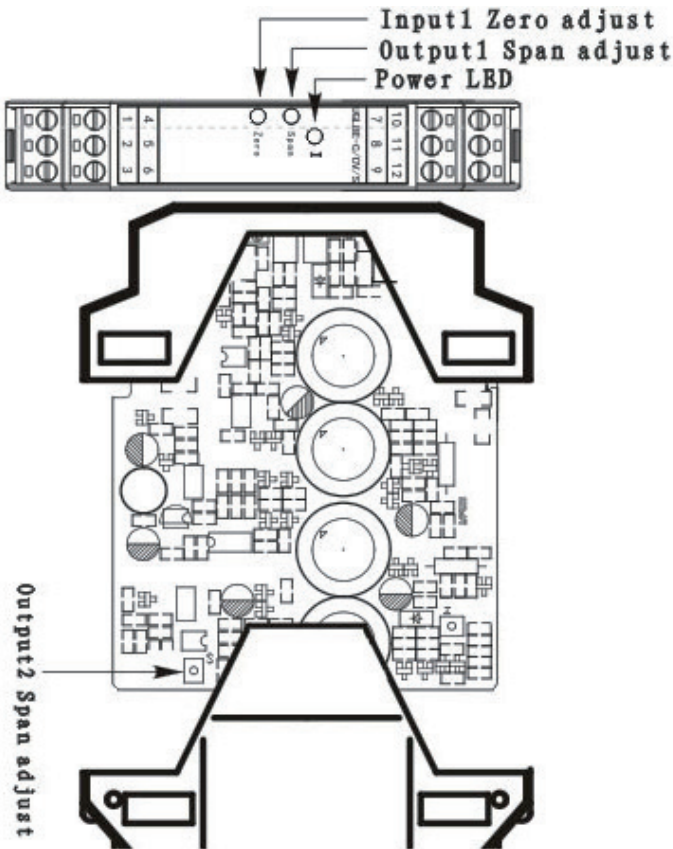


**Please Read Before Wiring the Product!**

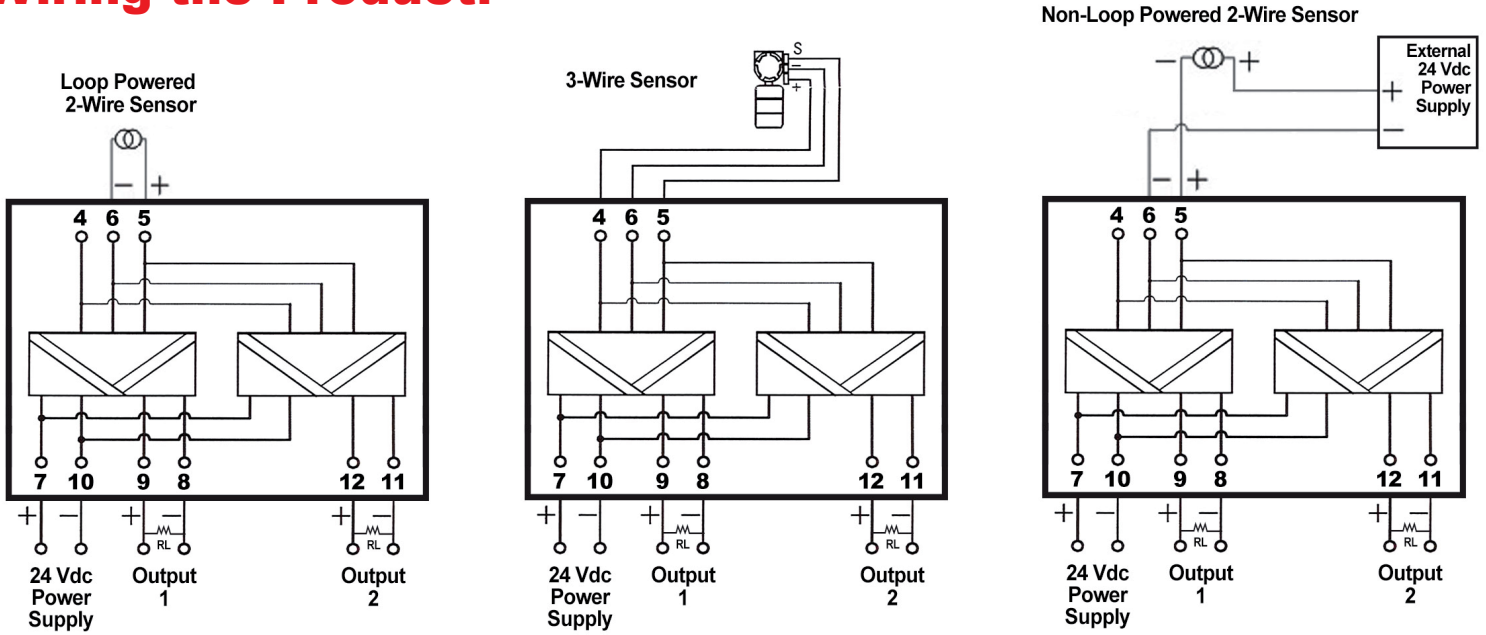

INPUT	
Input Current	4-20mA <sub>dc</sub> ; 0-20mA <sub>dc</sub>
Input Impedance	≤ 50 Ω
Max. Current	≤ 30mA <sub>dc</sub>
Power Supply	17.5 – 25V <sub>dc</sub> ; I < 30mA <sub>dc</sub>
OUTPUTS 1 & 2	
Output Current	4-20mA <sub>dc</sub>
Load Resistance	≤ 300 Ω
Max. Current	< 30mA <sub>dc</sub>
Additional Technical Information.	
Power Supply	24 V <sub>dc</sub> ± 10%
Power Dissipation	Approx. 2.9 W
Transmission Error	0.5% F.S.
Temperature Coefficient	0.05% F.S./10° C
Dielectric Strength (Between Input, Output and Power)	1500 Vac; 1 min
Insulation Resistance (Between Input, Output and Power)	≥ 100MΩ, 500 V <sub>dc</sub>
Ambient Temperature	-40 °C to +60 °C
Storage Temperature	-40 °C to +80 °C
Relative Humidity	10% - 90% RH
Dimensions: (DxWxH)	99 x 17.5 x 114 mm
Operating Environment: Avoid operating in areas surrounded by dust, corrosive gases, strong vibrations or shocks.	