


NDB3 - **30** **Z4** **1** - **1** **Q** **H** **Y1** **1** **0** **R**

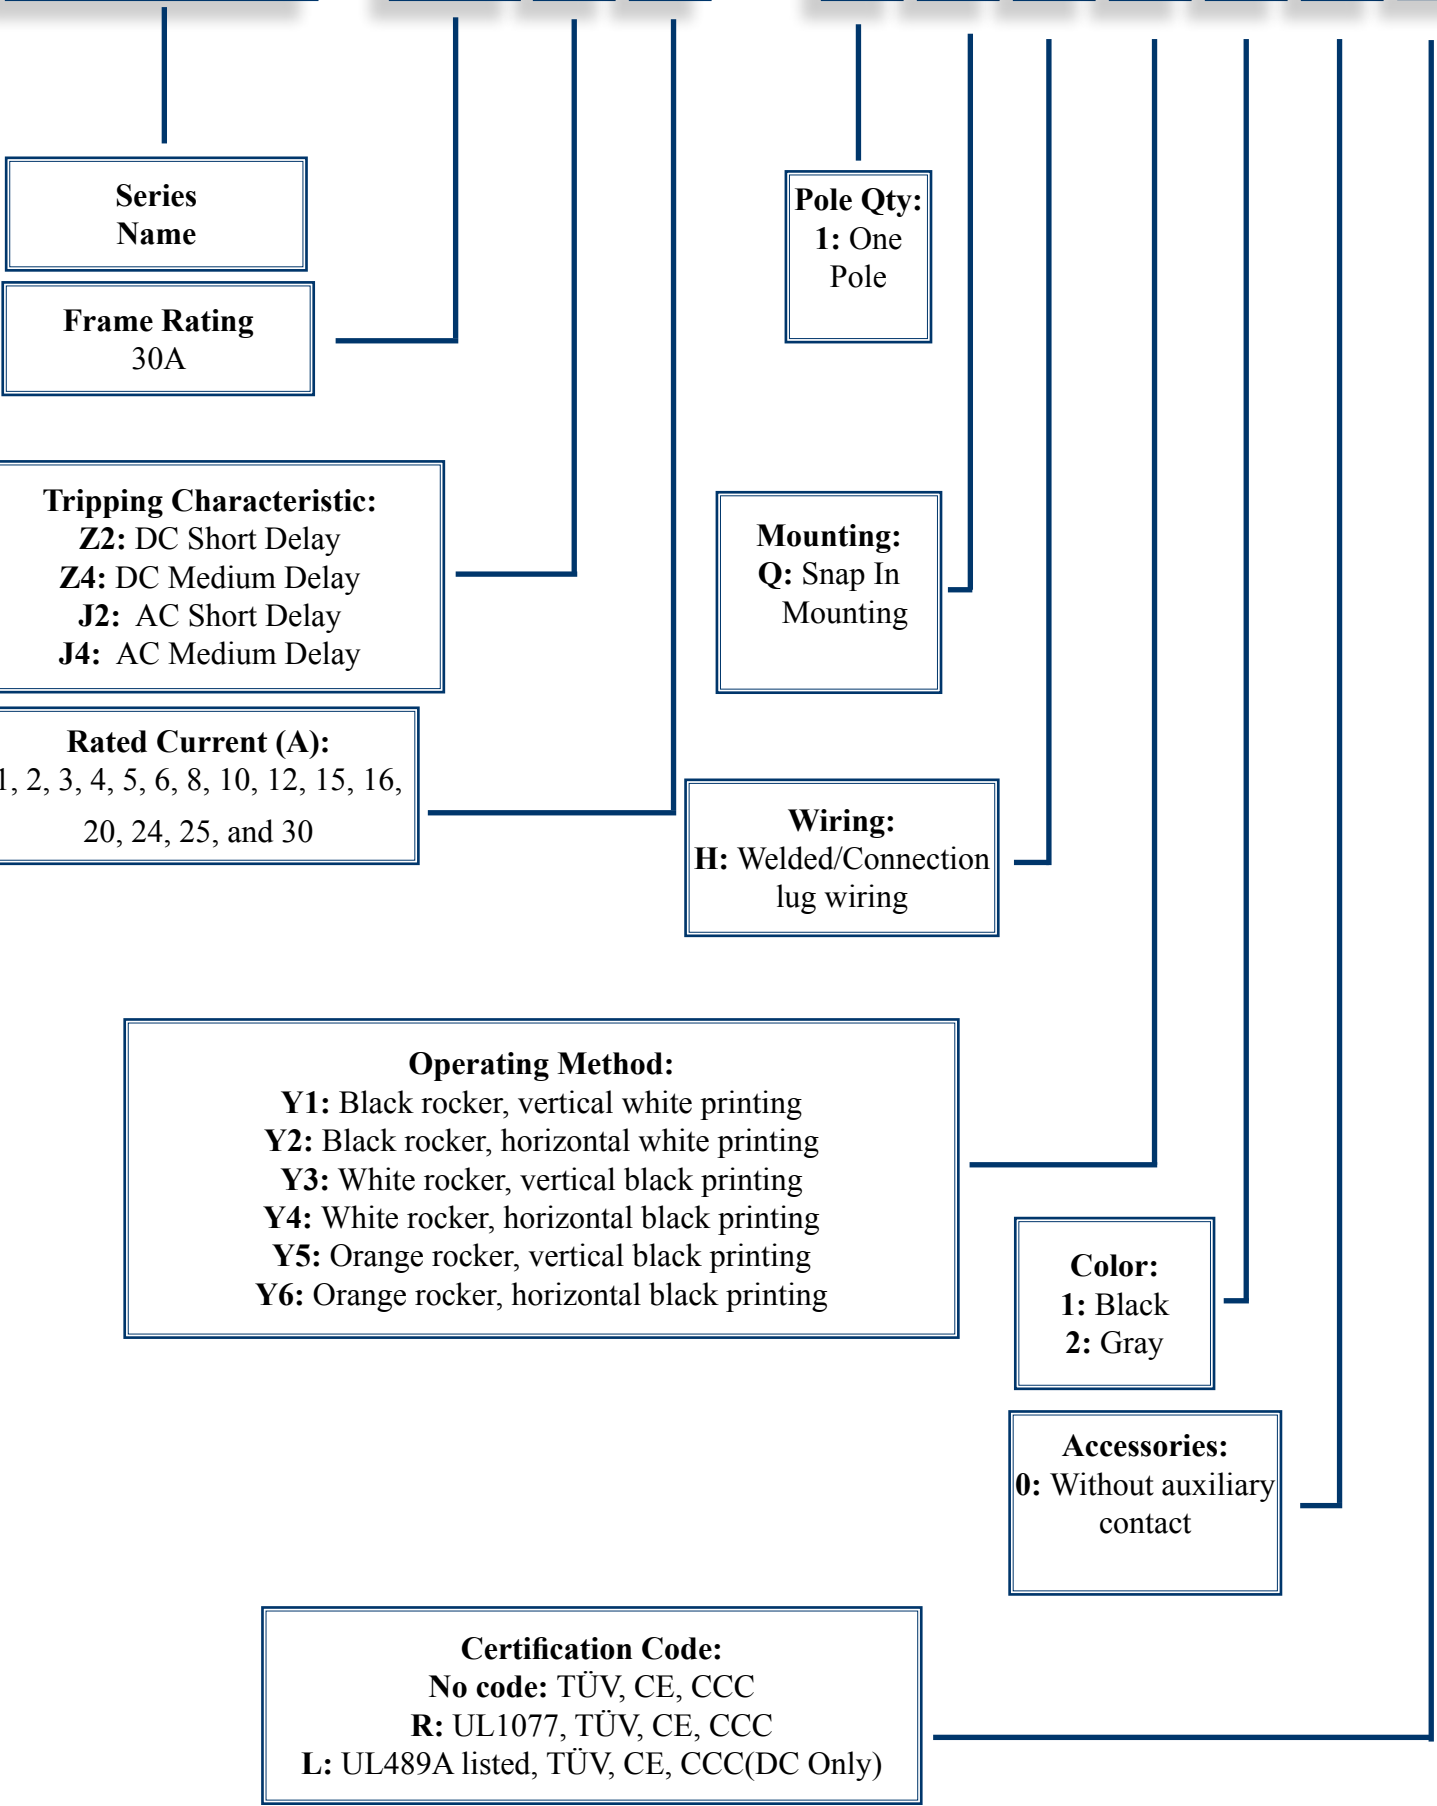

Series Name

Frame Rating
30A

Tripping Characteristic:
Z2: DC Short Delay
Z4: DC Medium Delay
J2: AC Short Delay
J4: AC Medium Delay

Rated Current (A):
1, 2, 3, 4, 5, 6, 8, 10, 12, 15, 16,
20, 24, 25, and 30

Pole Qty:
1: One Pole

Mounting:
Q: Snap In Mounting

Wiring:
H: Welded/Connection lug wiring

Operating Method:
Y1: Black rocker, vertical white printing
Y2: Black rocker, horizontal white printing
Y3: White rocker, vertical black printing
Y4: White rocker, horizontal black printing
Y5: Orange rocker, vertical black printing
Y6: Orange rocker, horizontal black printing

Color:
1: Black
2: Gray

Accessories:
0: Without auxiliary contact

Certification Code:
No code: TÜV, CE, CCC
R: UL1077, TÜV, CE, CCC
L: UL489A listed, TÜV, CE, CCC(DC Only)