

2082
20E2

Nickel Plated Brass

Material: NICKEL PLATED BRASS

(CuZn 40 Pb 3)

Sealing-ring: NEOPRENE®

Cable grip insert: POLYCARBONATE

O-Ring: NITRILE 70 sh A (factory fitted)



Protection: IP 68

Temperature range:

-25°C to +120°C (continuous),

for Pg36, Pg42 and Pg48

-30°C to +95°C (continuous)

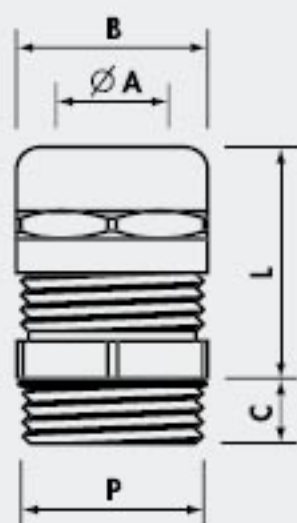

Pg thread DIN 40 430

Ref. Nickel Plated Brass	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	C (mm)	L (mm)	Quantity
208200711N	Pg 7	12,5	3 - 6	14	5	19	50
208200911N	Pg 9	15,5	5 - 8	17	6	19	50
208201111N	Pg11	19	6 -10	20	6	20	50
208201311N	Pg13,5	20,5	8 -12	22	6,5	21,5	50
208201611N	Pg16	22,5	9,5-14	24	6,5	23,5	50
208202111N	Pg21	29	11,5-18	30	7	28	20
208202911N	Pg29	37	15 -24	40	8	35	20
208203611N	Pg36	47	23 -30	50	9	41	10
208204211N	Pg42	54	26 -35	58	10	47	5
208204811N	Pg48	60	35 -40	64	10	49	5

extended thread

Pg thread DIN 40 430

Ref. Nickel Plated Brass	P	Fixing Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	C (mm)	L (mm)	Quantity
20E200711N	Pg 7	12,5	3 - 6	14	15	19	50
20E200911N	Pg 9	15,5	5 - 8	17	15	19	50
20E201111N	Pg11	19	6 -10	20	15	20	50
20E201311N	Pg13,5	20,5	8 -12	22	15	21,5	50
20E201611N	Pg16	22,5	9,5-14	24	15	23,5	50
20E202111N	Pg21	29	11,5-18	30	15	28	20
20E202911N	Pg29	37	15 -24	40	15	35	20
20E203611N	Pg36	47	23 -30	50	18	41	10
20E204211N	Pg42	54	26 -35	58	18	47	5
20E204811N	Pg48	60	35 -40	64	18	49	5

www.asi-ez.com

877-650-5160

PO Box 1340 Mechanicsburg PA 17055