

ASIDIK1.5LA24XXOM Multi-Level PNP Sensor Terminal Block

ASI011070 ASIDIK1.5LA24RDOM
ASI011071 ASIDIK1.5LA24GNOM


- Screw Clamp DIN Rail Mount Terminal Block
- Upper Level: Signal Feed-Through
- Middle Level: Sensor Power (-) via External Side Entry Bridge
- Lower Level: Sensor Power (+) via External Side Entry Bridge

DIMENSIONS

Depth x Width x Height: 55 x 6.2 x 54 mm
(2.165 x 0.244 x 2.126")

TECHNICAL PARAMETERS

Voltage: 300 V
Current: 15 A
Wire Range: 30-14 AWG sol/str
Torque: 5-7 Lb In
Stripping Length: 8 mm (0.315")

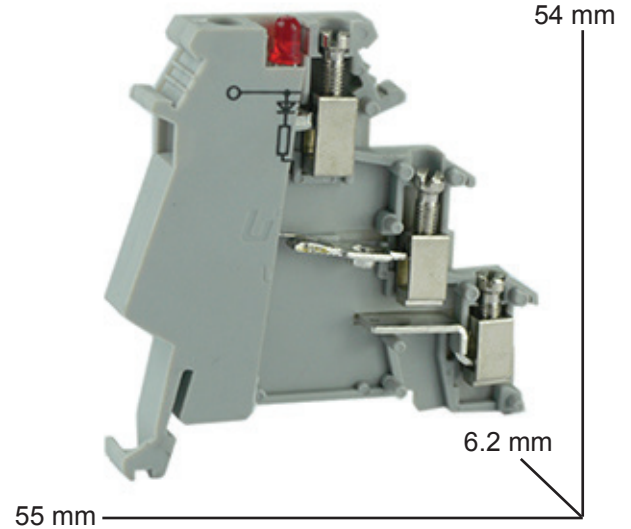

ACCESSORIES



ASIATPDIK1.5-Partition Plate



External Side Entry Bridge:
ASIEB10DIKRD-10 pos. Red
ASIEB80DIKRD-80 pos. Red
ASIEB10DIKBU-10 pos. Blue
ASIEB80DIKBU-80 pos. Blue
ASIEB10DIKWH-10 pos. White
ASIEB80DIKWH-80 pos. White

ASI014002-Blank Markers, 10 pos.