


- Screw Clamp DIN Rail Mount Terminal Block
- Upper Level: Signal Feed-Through
- Middle Level: Actuator Power (+) via External Side Entry Bridge
- Lower Level: Actuator Ground

**DIMENSIONS**

Depth x Width x Height: 61.5 x 6.2 x 54 mm  
(2.42 x 0.244 x 2.126")

**TECHNICAL PARAMETERS**

Voltage: 300 V  
Current: 15 A  
Wire Range: 30-14 AWG sol/str  
Torque: 5-7 Lb In  
Stripping Length: 8 mm (0.315")

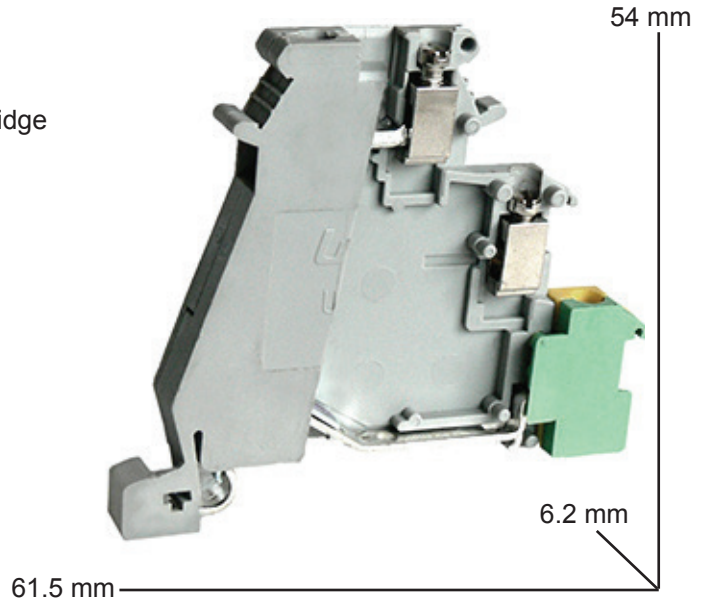

**ACCESSORIES**



ASIATPDIKD1.5-Partition Plate



**External Side Entry Bridge:**  
ASIEB10DIKRD-10 pos. Red  
ASIEB80DIKRD-80 pos. Red  
ASIEB10DIKBU-10 pos. Blue  
ASIEB80DIKBU-80 pos. Blue  
ASIEB10DIKWH-10 pos. White  
ASIEB80DIKWH-80 pos. White



ASIFBI106-Screw-In Internal Jumper, 10 pos.

ASI014002-Blank Markers, 10 pos.