


Tapered blades and streamlined handles. Shape of the blades optimizes cutting of conductors with minimum effort. Handles have crimping die for ferrules and other crimp terminals up to 10 AWG.

**Cutting Range
up to 1/0 AWG**



Microteeth

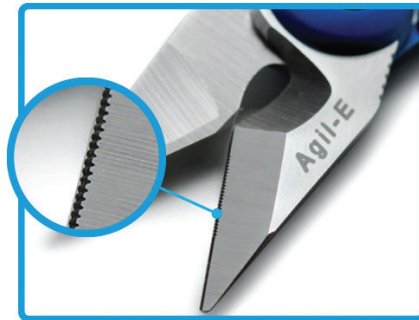

Anti-loosening pivot



Dual-compound streamlined handles



Case with belt fastening system

