


Modular, Wire-Guard Fixed PCB Terminal Blocks

The CMM printed circuit board terminal block is a family of low-cost modular, interlocking terminal blocks with a 16 amp rating. The CMM terminal blocks are available in two pin spacings and in 2 and 3 positions that can be joined together to make any combination of circuits to fit the application requirements. The wire is protected during termination with a foil between the screw and the wire. The CMM is UL recognized and is ideal where the need is for a slightly larger low-cost terminal block.

SPECIFICATIONS

Housing Material:	PA68 Polyimide, Flammable UL94V0
Housing Color:	Gray
Screw:	Zinc Plated Steel
Clamp:	Nickel Plated Brass
Pin:	Tin Plated Brass
Testing torque:	4.4 in/lb
Wire range:	14-24 AWG
P.C.B. mounting hole:	1.3mm
Nominal current:	16 A
Voltage:	300 V
Temperature Range:	-30° C to 85° C

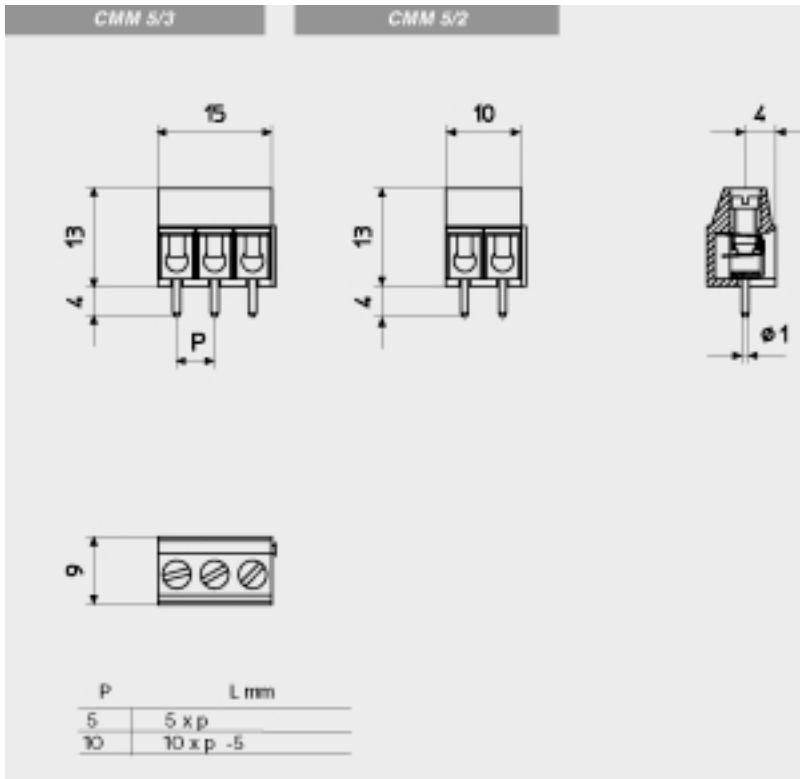

Catalog #	No. of Positions	Length (mm)
CMM5/2	2	10
CMM5/3	3	15

To locate additional product specifications and technical drawings go to www.asi-ez.com