
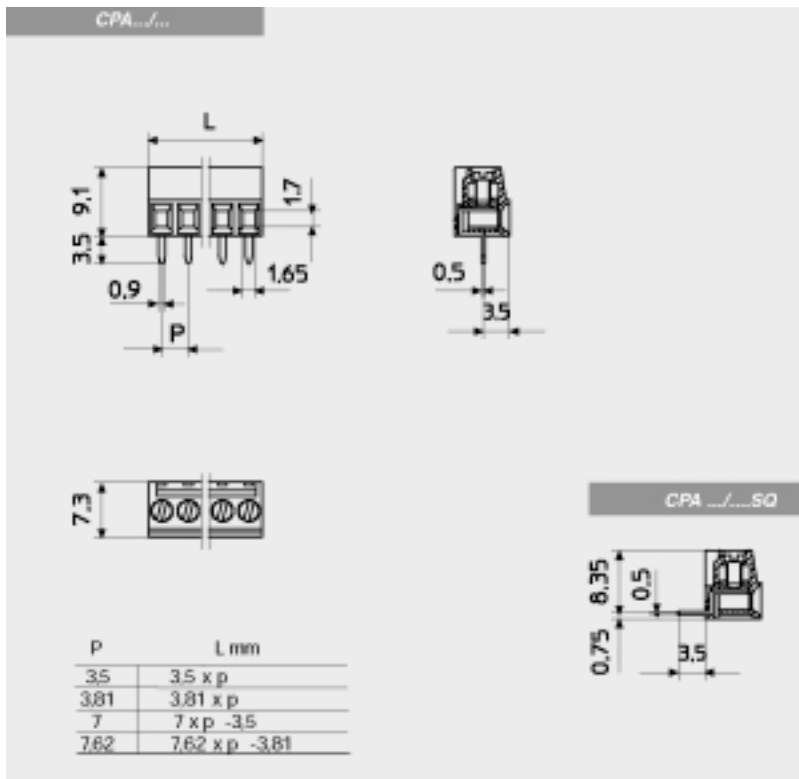


Miniature, Multi-Position Fixed PCB Terminal Blocks

The CPA is a single sub-miniature printed circuit board terminal block that is available in several pin spacings and from 1 to 24 positions. The CPA uses a moving metal body design for the termination of the wire to insure maximum reliability. The CPA is UL recognized and will terminate wire ranging from 16 to 30 A WG and will handle 10 amps at 300 volts. The CPA is available in a right angle version. The standard color is green, however several other colors are available upon request.

SPECIFICATIONS

Housing Material:	PA68 Polyimide, Flammable UL94V0
Housing Color:	Green
Screw:	Zinc Plated Steel
Clamp:	Nickel Plated Brass
Pin:	Tin Plated Brass
Testing torque:	2.7 in/lb
Wire range:	16-30 AWG
P.C.B. mounting hole:	1.1mm
Nominal current:	10 A
Voltage:	300 V
Temperature Range:	-30° C to 110° C

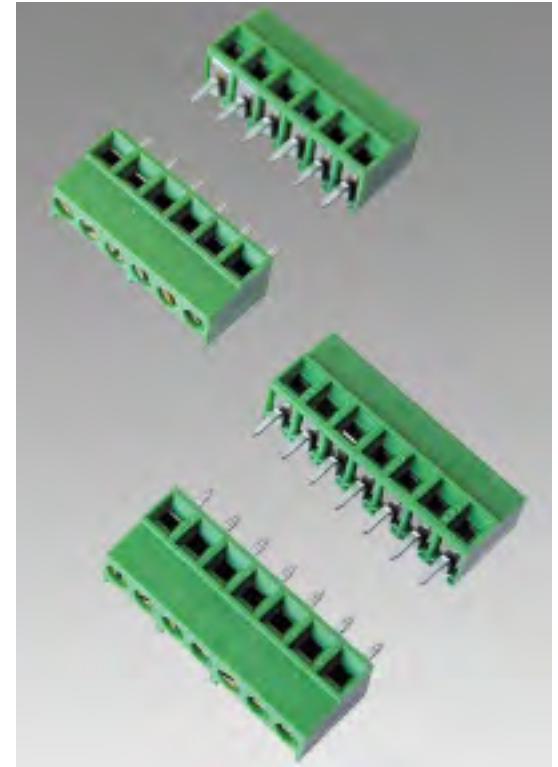

Catalog #	No. of Positions	Length (mm)
CPA7.62-2VE	2	15.24
CPA7.62-3VE	3	22.86
CPA7.62-4VE	4	30.48
CPA7.62-5VE	5	38.10
CPA7.62-6VE	6	45.72
CPA7.62-7VE	7	53.34
CPA7.62-8VE	8	60.96
CPA7.62-9VE	9	68.58
CPA7.62-10VE	10	76.20
CPA7.62-11VE	11	83.82
CPA7.62-12VE	12	91.44

To locate additional product specifications and technical drawings go to www.asi-ez.com