


Standard Pluggable PCB Terminal Block Header

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 12 amps, 300 volts. The standard color is green, however other colors are available upon request.

SPECIFICATIONS

Housing Material: PA68 Polyimide, Flammable UL94V0
 Housing Color: Green
 Screw: Zinc Plated Steel
 Clamp: Nickel Plated Brass
 Pin: Tin Plated Brass
 P.C.B. mounting hole: 1.6mm
 Nominal current: 12 A
 Voltage: 300 V
 Temperature Range: -30° C to 85° C

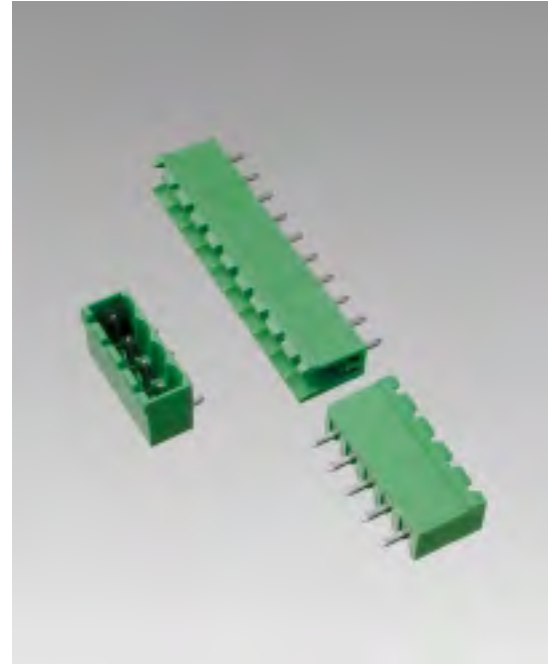

CPM .../...		Catalog #		No. of Positions	Length (mm)
P	L mm	CPM10.16-2	2	24.20	
5	5 x p +1.2	CPM10.16-3	3	34.36	
5.08	5.08 x p +1.2	CPM10.16-4	4	44.52	
10	10 x p -3.8	CPM10.16-5	5	54.68	
10.16	10.16 x p -3.88	CPM10.16-6	6	64.84	
		CPM10.16-7	7	75.00	
		CPM10.16-8	8	85.16	
		CPM10.16-9	9	95.32	
		CPM10.16-10	10	105.48	
		CPM10.16-11	11	115.64	
		CPM10.16-12	12	125.80	

To locate additional product specifications and technical drawings go to www.asi-ez.com