
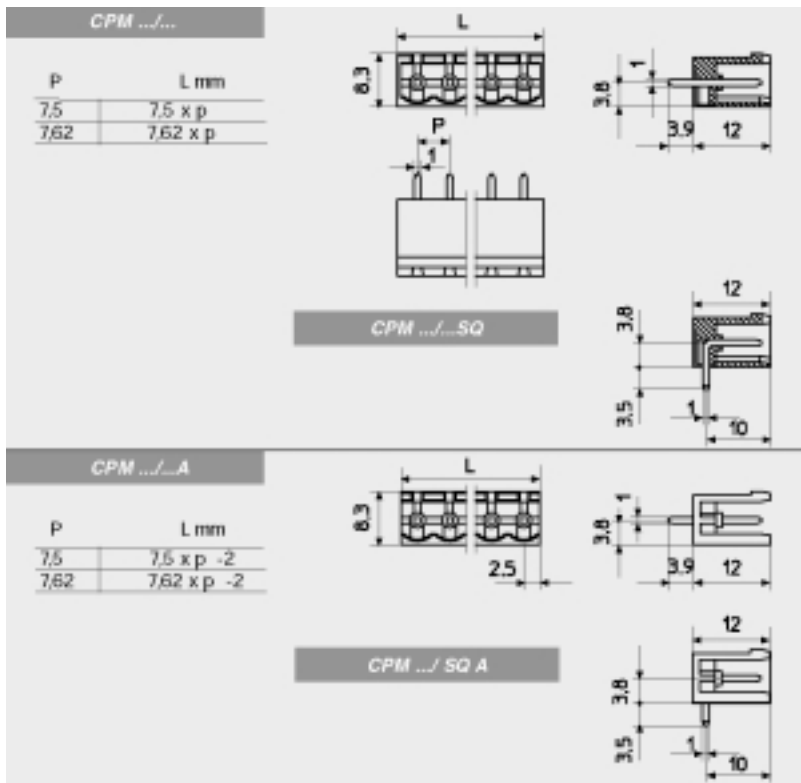


# Standard Pluggable PCB Terminal Block Header

The CPM family of printed circuit board headers is used with the CPF and MRT3 pluggable terminal blocks. The CPM is available in both a vertical and 90 degree version and with either open or closed ends. A feature of the CPM header is the molded-in polarization that insures proper mating of the plug. The CPM headers are available in 2 to 24 positions and have a UL rating of 12 amps, 300 volts. The standard color is green, however other colors are available upon request.

## SPECIFICATIONS

Housing Material: PA68 Polyimide, Flammable UL94V0  
 Housing Color: Green  
 Screw: Zinc Plated Steel  
 Clamp: Nickel Plated Brass  
 Pin: Tin Plated Brass  
 P.C.B. mounting hole: 1.6mm  
 Nominal current: 12 A  
 Voltage: 300 V  
 Temperature Range: -30° C to 85° C

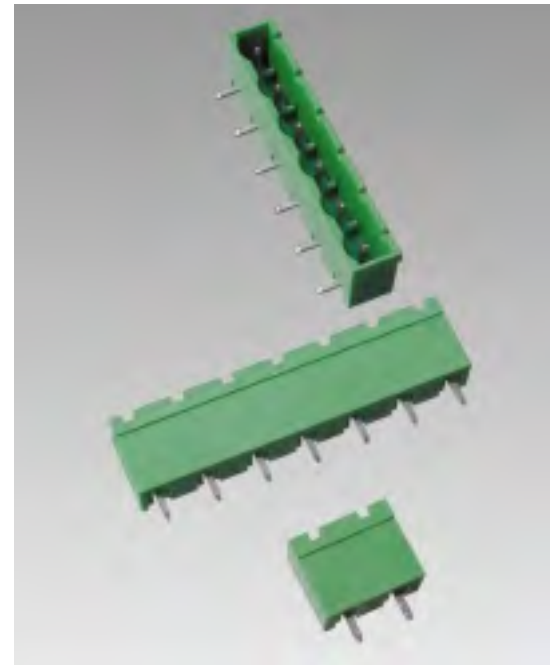

Catalog #	No. of Positions	Length (mm)
CPM7.5-2	2	15
CPM7.5-3	3	22.5
CPM7.5-4	4	30
CPM7.5-5	5	37.5
CPM7.5-6	6	45
CPM7.5-7	7	52.5
CPM7.5-8	8	60
CPM7.5-9	9	67.5
CPM7.5-10	10	75
CPM7.5-11	11	82.5
CPM7.5-12	12	90

To locate additional product specifications and technical drawings go to [www.asi-ez.com](http://www.asi-ez.com)