


Miniature, Modular Fixed PCB Terminal Blocks

The CPP sub-miniature printed circuit board terminal blocks are one of the smallest designs on the market. The housings are modular and interlocking in 2 and 3 positions, and can be combined to come up with any number of circuits, thereby reducing inventory requirements. This sub-miniature printed circuit board terminal block is UL recognized, is rated at 16 to 30 A WG, and 10 amps at 300 volts. The CPP incorporates a moving metal body design for wire termination and features high quality metal and plating materials. The CPP standard color is green, however other colors are available upon request.

SPECIFICATIONS

Housing Material:	PA68 Polyimide, Flammable UL94V0
Housing Color:	Green
Screw:	Zinc Plated Steel
Clamp:	Nickel Plated Brass
Pin:	Tin Plated Brass
Testing torque:	2.7 in/lb
Wire range:	16-30 AWG
P.C.B. mounting hole:	1.1mm
Nominal current:	10 A
Voltage:	300 V
Temperature Range:	-30° C to 110° C

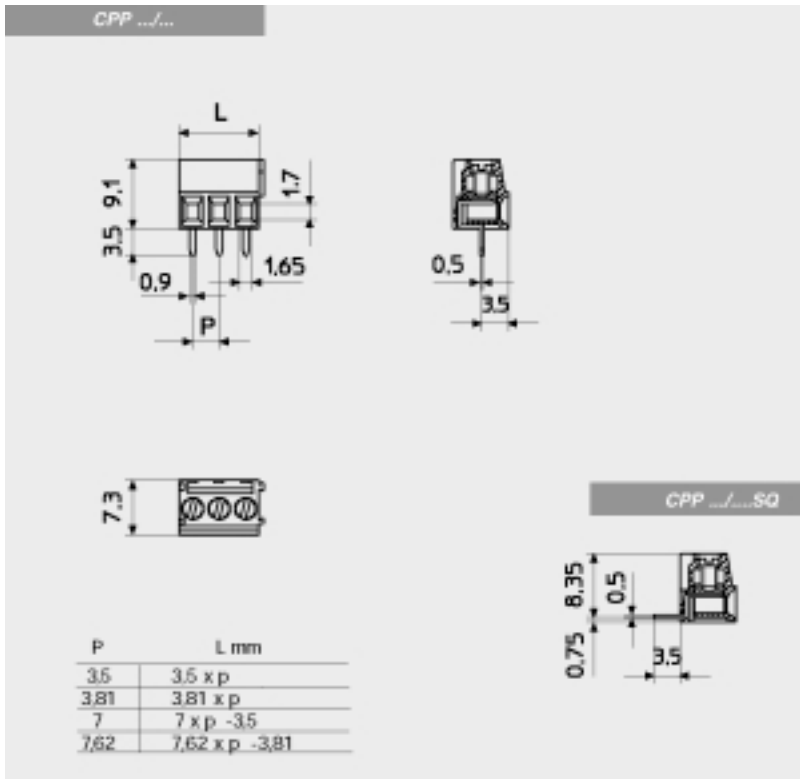

Catalog #	No. of Positions	Length (mm)
CPP3.81-2SQVE	2	7.62
CPP3.81-3SQVE	3	11.43

To locate additional product specifications and technical drawings go to www.asi-ez.com