

# Divisible Pluggable PCB Terminal Block Header

The CUM blade style printed circuit board header is used with the CUF pluggable terminal block. It is a header of 18 or 36 positions that can be divided into any number of circuits. The CUM header has a UL rating of 14 amps, 300 volts and has keying accessories to provide for special keyed configurations.




## SPECIFICATIONS

Housing Material:	PA68 Polyamide, Flammable UL94V0
Housing Color:	Gray
Screw:	Zinc Plated Steel
Clamp:	Nickel Plated Brass
Pin:	Tin Plated Brass
P.C.B. Mounting Hole:	1.3 mm
Nominal current:	14 A
Voltage:	300 V
Temperature Range:	-30° C to 85° C



Catalog #	No. of Positions	Length (mm)
CUM5-36	36	180

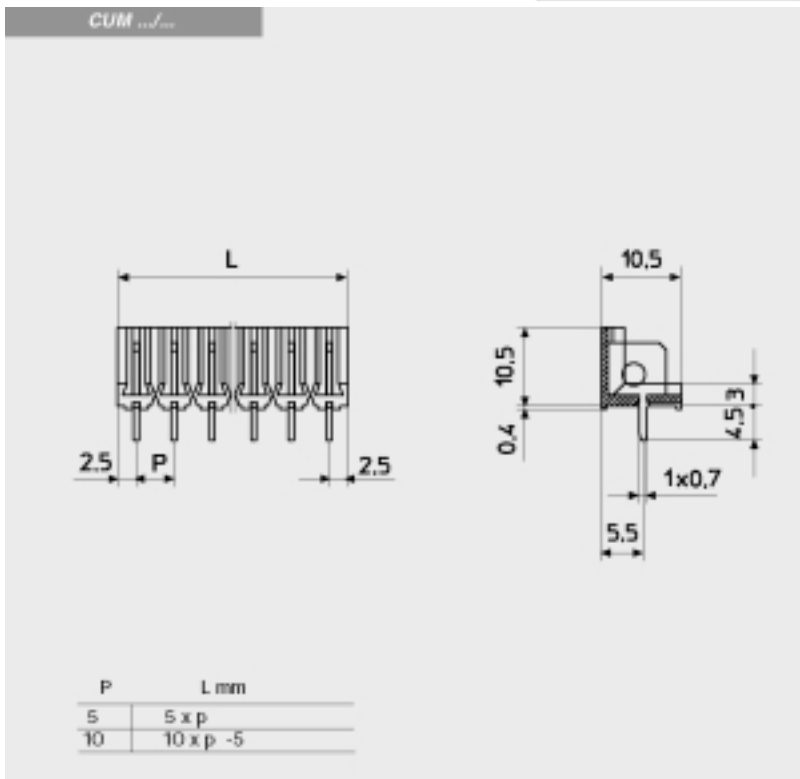

To locate additional product specifications and technical drawings go to [www.asi-ez.com](http://www.asi-ez.com)