

Pitch Pass	Passo Rastermaß	mm
Rated Voltage Tensione nominale	Tensione nominale Bemessungsspannung	V
Rated Current Intensità nominale	Corrente nominale Bemessungsstrom	A
Types of cables Type du conducteur	Tipo cavi Leitungstypen	
Nominal cross section Section nominale	Sezione nominale Nennquerschnitt	mm ² AWG
Stripping length Longueur de dénudage	Lunghezza spelatura Abisolierlänge	mm
Torque Couple de serrage	Coppia di torsione Drehmoment	Nm Lb-in
Temperature Température	Temperatura Temperatur	°C
Housing Corps isolant	Corpo isolante Isolierkörper	
Captive Screw Vis imperdabile	Vite Imperdibile Unverlierbare Schraube	
		mm
	IMQ	EN60998
	VDE	EN50998
	cUL	UL1059 + C22.2 n°158
Poles Pôles	Polli Polzahl	X
Colours Couleurs	Colori Farben	Y
Other information Autres données	Altri dati Weitere Informationen	P
How to order Référence de commande	Ordinazione Bestellschlüssel	
CLA 10 / X	SQ Y N...	
Type Pitch Poles Version Colors Pricing	Type Passo Poli Versione Colori Numerazione	
Type Pass Pôles Version Couleurs Marquage	Type Pass Pôles Version Couleurs Marquage	
Type Rastermaß Polzahl Version Farben Bedruckung	Type Rastermaß Polzahl Version Farben Bedruckung	





CUU CUU..SQ*


Single block - Blocco unico
Monobloc - Einzelblock

Poles - Poli - Pôles - Polzahl

2/36



5		
250		
22		
		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	4
85		
PC - UL 94 V0		
M2,5		
 0,6 x 3,5		
V	A	mm ² /AWG
450	22	0,5 ÷ 2,5
450	22	0,5 ÷ 2,5
300	16	24 ÷ 12
min 2 - max 36		
GR / on demand NE		
D/A1		

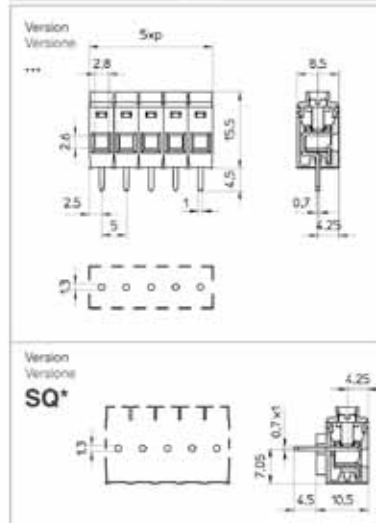






CUU CUU..SQ*


Single block - Blocco unico
Monobloc - Einzelblock

Poles - Poli - Pôles - Polzahl

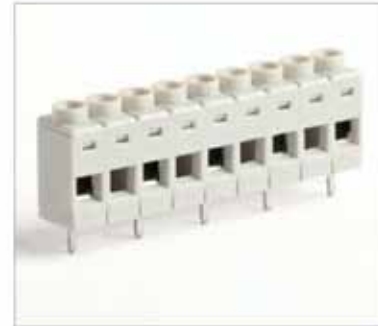2/18



10		
500		
22		
		
0,2 ÷ 4 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12	0,2 ÷ 2,5 30 ÷ 12
6		
0,5	/	4
85		
PC - UL 94 V0		
M2,5		
 0,6 x 3,5		
V	A	mm ² /AWG
750	22	0,5 ÷ 2,5
750	22	0,5 ÷ 2,5
300	16	24 ÷ 12
min 2 - max 18		
GR / on demand NE		
D/A1		

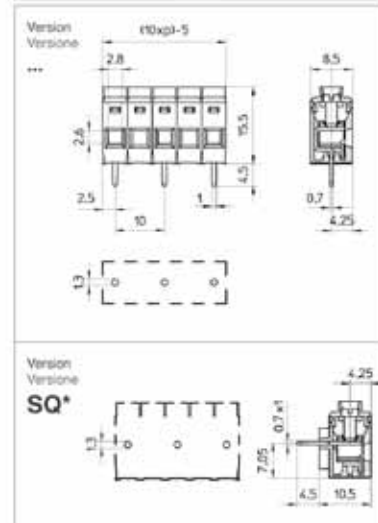

* SQ Version = Horizontal version