



Fuse Holder Terminal Blocks

The fuse holder terminal blocks are available in styles that will handle the standard control circuit 5 x 20mm and 1/4" x 1-1/4" fuses. Each fuse block is self-contained with a lever that holds, inserts and extracts the fuse from the circuit. Fuse holder terminal blocks are available with and without blown fuse indication. The visual indication that is provided when the fuse blows is an ideal method of simplifying troubleshooting and reducing downtime. The fuse holder terminal block is fully insulated, thereby providing shock hazard protection.

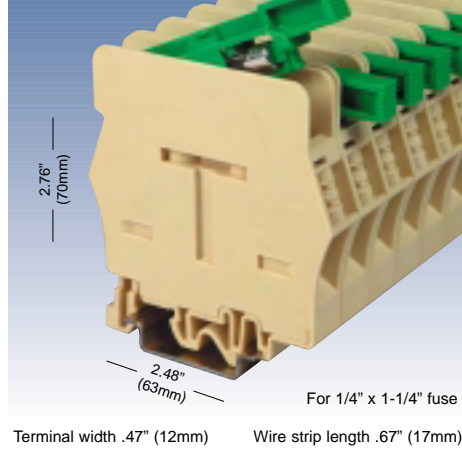

FPC.10

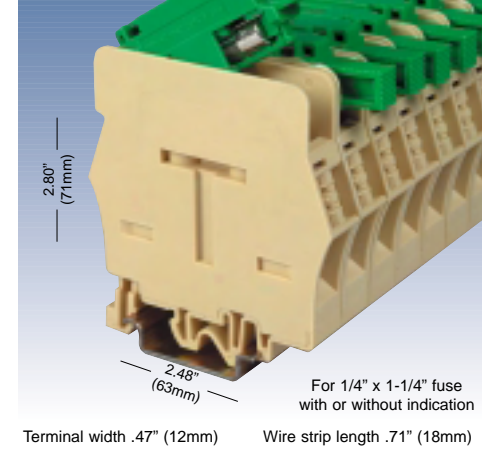

FPL.10

SPECIFICATIONS

Connection Data
 1059
 No. 22-2, No. 158
 IEC 947-7-1

ORDERING INFORMATION

Fuse holder terminal block,	
standard without indication	Beige
standard with 24 VDC	Beige
standard with 115 VAC	Beige
standard with 230 VAC	Beige
standard with 12 VDC	Beige

ACCESSORIES

End cover, width .06" (1.5mm)	Beige
	Blue

Internal bridge assembly kit, 2 position

External bridge,

Multiple circuit bridge bar, (250mm)
 2 through 45 circuits based on length, used with bridge kit

Circuit bridge kit,
 consisting of screw and spacer, used with bridge bar

Partition plate,	White
	Red
	Green

Test socket, for circuit testing with test plug (SDD)

Test plug, for circuit testing with test socket (PSD)

Marking system,	blank marker
	printed marker
	custom marker
	universal marker

End stop, width .31" (8mm)	
universal	
35mm rail only	

Mounting rail, DIN (2 meter length)	
non-slotted symmetrical 35mm x 7.5mm	
slotted symmetrical 35mm x 7.5mm	
non-slotted symmetrical 35mm x 15mm	
slotted symmetrical 35mm x 15mm	

WIRE RANGE **CURRENT (A)** **VOLTAGE (V)**

16 - 6 AWG		
20 - 6 AWG	15	600
—		
1.5 - 10mm	35	800

TYPE **CATALOG No.** **Pcs/PKG**

FPC.10	FP100	70
—		
—		
—		
—		

TYPE **CATALOG No.** **Pcs/PKG**

—		
---	--	--

—

—

—

—

DFU/6/B	DU06B	25
DFU/6/R	DU06R	25
DFU/6/V	DU06V	25

—

SDD/2	DD002	50
-------	-------	----

SNZ/10/00	SN005	60
SNZ/10/...	SN5..	60
CM	CM...	
CNU/8/030	NU008	5

BTU	BT005	25
BT/3	BT003	25

PR/3/AC	PR003	1
PR/3/AS	PR005	1
PR/3/PP	PR007	1
PR/3/PA	PR006	1

WIRE RANGE **CURRENT (A)** **VOLTAGE (V)**

16 - 6 AWG		
20 - 6 AWG	15	300
—		
1.5 - 10mm	25	800

TYPE **CATALOG No.** **Pcs/PKG**

FPL.10/L	FP200	70
FPL.10/C24	FP924	70
FPL.10/C115	FP915	70
FPL.10/C230	FP923	70
FPL.10/C12	FP912	70

TYPE **CATALOG No.** **Pcs/PKG**

—		
---	--	--

—

—

—

—

DFU/6/B	DU06B	25
DFU/6/R	DU06R	25
DFU/6/V	DU06V	25

—

—

SNZ/10/00	SN005	60
SNZ/10/...	SN5..	60
CM	CM...	
CNU/8/030	NU008	5

BTU	BT005	25
BT/3	BT003	25

PR/3/AC	PR003	1
PR/3/AS	PR005	1
PR/3/PP	PR007	1
PR/3/PA	PR006	1