


	 <p>HQ Series: 5 Position Pkg Size: 1</p>	 <p>HQ Series: 7 Position Pkg Size: 1</p>		
<b>Description</b>	Type	Order No.	Type	Order No.
Male Insert Screw connection	HQ-005-M	2050052101	HQ-007-M	HSBIN12M
Female Insert Screw Connection	HQ-005-F	2050052201	HQ-007-F	HSBIN12F
Approvals	CSA		CSA	
<b>General Data</b>				
Rated Current (A)	16 A		10 A	
Rated Voltage (V)	600 V		600V	
Mechanical Life Mating Cycles (max)	≥ 500		≥ 500	
Temperature Range	-40°C + 125		-40°C + 125	
<b>Connection Data</b>				
Wire Range (AWG)	20-14		20-14	
Recommended Tightening Torque (Nm)	.25 Nm		.25Nm	
<b>Material Data</b>				
Insert Material	Polycarbonate		Polycarbonate	
Inflammability class in acc. with UL94	VO		VO	
Contact Material	Copper Alloy		Copper Alloy	
Screw clamp contacts	Silver Plated		Silver Plated	
Crimp contacts	Silver and Gold Plated		Silver and Gold Plated	
Hoods and Housings	H3A Series		H3A Series	

## HQ Series: 5 Position



## HQ Series: 7 Position

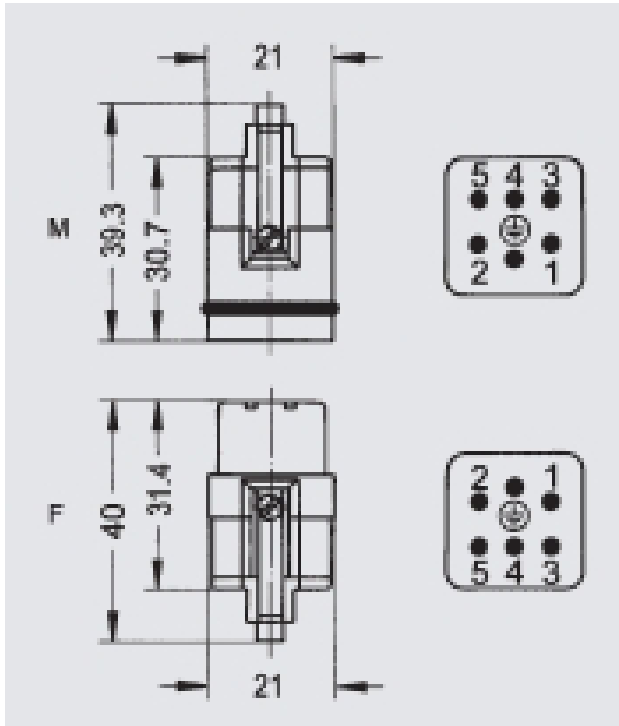