


# HTE Series

with polyamide insulating body

- UL94V-0
- mounting onto PR/3 type rails according to IEC 60715 Std., "TH/35" type
- for earth connection with yellow/green insulating body

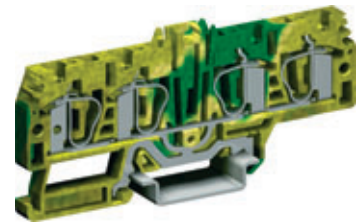

yellow/green version	HTE.4 Cat. No. HT250	HTE.4/1+2 Cat. No. HT260	HTE.4/2+2 Cat. No. HT270
<b>(Ex)i version</b>			
<b>TECHNICAL CHARACTERISTICS</b>			
function / type	earth	earth, 1 input and 2 outputs	earth, 2 inputs and 2 outputs
rated cross-section (mm <sup>2</sup> )	4	4	4
connecting capacity			
flexible (mm <sup>2</sup> )	0,2 ÷ 6	0,2 ÷ 6	0,2 ÷ 6
rigid (mm <sup>2</sup> )	0,2 ÷ 6	0,2 ÷ 6	0,2 ÷ 6
max. flexible with ferrule (mm <sup>2</sup> )-ferrule type	4 - WP40/16	4 - WP40/16	4 - WP40/16
rated voltage / rated current / gauge conf. to IEC 60947-7-1	- / - / A4	- / - / A4	- / - / A4
rated voltage / rated current / AWG UL	- / - / 24-10 AWG	-	-
rated impulse withstand voltage / pollution degree	8 KV / 3	8 KV / 3	8 KV / 3
insulation stripping length (mm)	17	17	17
height / width / thickness TH/35 7,5 mm	45 / 58 / 6,2	45 / 78 / 6,2	45 / 98 / 6,2
height / width / thickness TH/35 15 mm	52 / 58 / 6,2	52 / 78 / 6,2	52 / 98 / 6,2
height / width / thickness G32	-	-	-
<b>APPROVALS</b>			
<b>ACCESSORIES</b>	<b>Type</b> <b>Cat. No.</b>	<b>Type</b> <b>Cat. No.</b>	<b>Type</b> <b>Cat. No.</b>
End sections grey/blue	<b>HMT.4/PT/GR</b> HM251GR	<b>HMT.4/1+2/PT/GR</b> HM211GR	<b>HMT.4/2+2/PT/GR</b> HM221GR
Permanent cross connection	<b>PTC/5/02</b> poles PTC0502 <b>PTC/5/03</b> poles PTC0503 <b>PTC/5/05</b> poles PTC0505 <b>PTC/5/10</b> poles PTC0510 <b>PTC/5/00</b> (40 poles) PTC0500	<b>PTC/5/02</b> poles PTC0502 <b>PTC/5/03</b> poles PTC0503 <b>PTC/5/05</b> poles PTC0505 <b>PTC/5/10</b> poles PTC0510 <b>PTC/5/00</b> (40 poles) PTC0500	<b>PTC/5/02</b> poles PTC0502 <b>PTC/5/03</b> poles PTC0503 <b>PTC/5/05</b> poles PTC0505 <b>PTC/5/10</b> poles PTC0510 <b>PTC/5/00</b> (40 poles) PTC0500
Rated current carrying capacity of jumper (A)	<b>32</b>	<b>32</b>	<b>32</b>
Cross-connection identification strip (100 mm) green	<b>PTC/SP</b> PTC0990	<b>PTC/SP</b> PTC0990	<b>PTC/SP</b> PTC0990
Multiple common bar 250 mm	-	-	-
Shunting screw and sleeve	-	-	-
Coloured partition red, green, white	<b>DFH/1</b> DH01..	<b>DFH/1</b> DH01..	<b>DFH/1</b> DH01..
Cross connection barrier red	-	-	-
Test plug socket	-	-	-
Test plug	<b>SDD/1</b> DD001	<b>SDD/1</b> DD001	<b>SDD/1</b> DD001
Modular test plug	-	-	-
End section for modular test plug	-	-	-
Numbering strip	<b>SHZ/4</b> SH002	<b>SHZ/4</b> SH002	<b>SHZ/4</b> SH002
Screwdriver for the activation of the spring	<b>CCH/2,5-4</b> CCH02	<b>CCH/2,5-4</b> CCH02	<b>CCH/2,5-4</b> CCH02
Warning plate on adjacent terminal blocks	-	-	-
Marking tag printed or blank	<b>CNU/8</b> NU...	<b>CNU/8</b> NU...	<b>CNU/8</b> NU...
End bracket	<b>BTU</b> for PR/DIN and PR/3 BT005 <b>BTO</b> BT007 <b>BT/3</b> for PR/3 only BT003	<b>BTU</b> for PR/DIN and PR/3 BT005 <b>BTO</b> BT007 <b>BT/3</b> for PR/3 only BT003	<b>BTU</b> for PR/DIN and PR/3 BT005 <b>BTO</b> BT007 <b>BT/3</b> for PR/3 only BT003
Mounting rail according to IEC 60715 Std.	<b>PR/3/AC</b> of steel PR003 <b>PR/3/AS</b> same with slots PR005	<b>PR/3/AC</b> of steel PR003 <b>PR/3/AS</b> same with slots PR005	<b>PR/3/AC</b> of steel PR003 <b>PR/3/AS</b> same with slots PR005

To locate additional product specifications and technical drawings go to [www.asi-ez.com](http://www.asi-ez.com)