



# AMPLIFIED INDUCTIVE SENSORS

## Ø 18 INCREASED RANGE

10÷30 V DC - 3 WIRES NPN OR PNP OUTPUT

- Range, 8mm to 14mm - shielded, not shielded
- Short housing models
- Cable or M12 quick connect models
- Operation LED




IS Series




INDUCTIVE

### IDENTIFICATION CODE

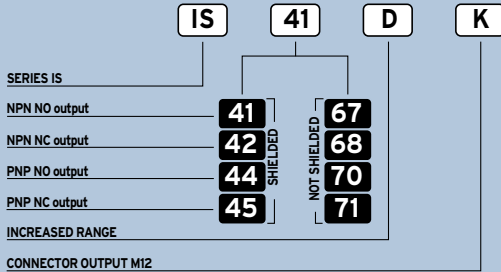


	SHIELDED	NOT SHIELDED
NOMINAL SWITCHING DISTANCE (S <sub>n</sub> )	8 mm	14 mm
NOMINAL VOLTAGE	10 ÷ 30 VDC (-15 / +10%)	
RESIDUAL RIPPLE	≤ 10%	
HYSTERESIS	< 10%	
MAX. OUTPUT CURRENT	200 mA	
RESIDUAL CURRENT	< 10 mA	
VOLTAGE DROP (Sensor ON)	< 1.2 V (I = 100 mA)	
OPERATION LED	Yellow	
SWITCHING FREQUENCY	400 Hz	
START UP DELAY	≤ 75 ms	
REPEATABILITY	≤ 3%	
SHORT CIRCUIT PROTECTION	Present (self-resetting)	
ELECTRIC PROTECTIONS	Against polarity reversal - inductive loads	
TEMPERATURE LIMITS	-25 + 70 °C	
PROTECTION DEGREE	IP 67	
CABLE LENGTH	2 m	
CABLE SECTION	3 x 0,25 mm <sup>2</sup>	
HOUSING MATERIAL	Nickel-plated brass	
WEIGHT - Cable output -	145 g	
WEIGHT - K connector output -	95 g	

### WIRING DIAGRAMS

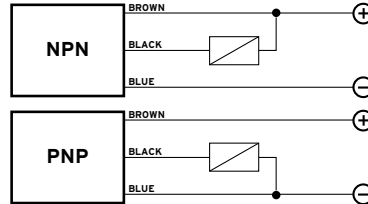

### CONNECTION WITH CONNECTOR M12 (K)





View of quadripole male connector

### CONTACTS CONFIGURATION

Available	Contacts numbers		
	1	2	3
(NO or NC)	+	-	NO/NC

### DIMENSIONS (mm)

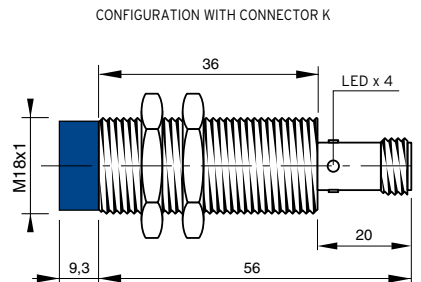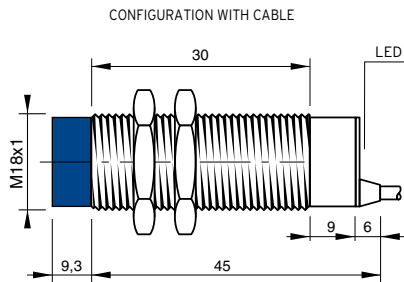

Note: The front part in blue refers to not shielded models

For the latest updated specifications see our web site: [www.infracor.com](http://www.infracor.com)

Copyright © 2000 Infracor. All rights reserved.

[www.asi-ez.com](http://www.asi-ez.com)