

Mounting adapter



LPX AU120

new

Order code	Description	Qty per pkg	Wt
		n°	[kg]
LPX AU120	Mounting adapter	10	0.019

Contact elements

7-12



LPX C...

new

Order code	Function	Qty per pkg	Wt
	All SPST	n°	[kg]

Screw termination.
Without mounting adapter.

LPX C10Ⓢ	$\begin{matrix} 1.3 \\ 1.4 \end{matrix}$ NOⓈ	10	0.011
LPX C10A	$\begin{matrix} 1.7 \\ 1.8 \end{matrix}$ EMⓈ	10	0.011
LPX C01⊖	$\begin{matrix} 1.1 \\ 1.2 \end{matrix}$ NCⓈ	10	0.011
LPX C01DⓈ⊖	$\begin{matrix} 1.5 \\ 1.6 \end{matrix}$ LBⓈⓈ	10	0.011

Screw termination.
With mounting adapter.

LPX E10Ⓢ	$\begin{matrix} 1.3 \\ 1.4 \end{matrix}$ NOⓈ	10	0.029
LPX E01⊖	$\begin{matrix} 1.1 \\ 1.2 \end{matrix}$ NCⓈ	10	0.029

Faston termination.
Without mounting adapter.

LPX CF10Ⓢ	$\begin{matrix} 1.3 \\ 1.4 \end{matrix}$ NOⓈ	10	0.012
LPX CF01⊖	$\begin{matrix} 1.1 \\ 1.2 \end{matrix}$ NCⓈ	10	0.012

- Ⓢ Not suitable for push-push actuators. Use LPX C10A (EM) or LPX C01 (NC) type only with push-push actuators.
- Ⓢ Normally open contact with early make operation.
- ⊖ Direct opening operation ⊖ in accordance with IEC/EN 60947-5-1.
- Ⓢ Normally closed contact with late break operation.



LPX E...

new



LPX CF01 LPX CF10

new

Operational characteristics

- Ambient conditions:
 - Operating temperature: -25...+70°C
 - Storage temperature: -40...+85°C
- Any mounting position is allowed.
- Degree of protection per IEC/EN:
 - IP20 for contacts elements with screw termination
 - IP00 for contact elements with Faston termination.
- Tightening torque: 1Nm/0.74lbf max (except Faston).

General characteristics of contact elements

Self cleaning, dual scraping-oscillating action
IEC rated insulation voltage: 690V
IEC rated thermal current Ith: 10A
Conductivity: 5V 1mA
UL/CSA and IEC/EN 60947-5-1 designation: A600 Q600.
IEC operational power in AC15:

[V]	12	24	48	120	240	400	480	500	600
[A]	6	6	6	6	3	1.9	1.5	1.4	1.2

IEC operational power in DC13:


[V]	12	24	48	125	250	440	500	600
[A]	3	3	1.5	0.55	0.27	0.15	0.13	0.1

Short-circuit protection fuse: max calibre 10A gG/GC.

Contact resistance: ≤20mΩ.

Terminals: Clamp screw with washer
Faston 1-6.35mm(0.25in) or 2-2.8mm (0.11in).

Stroke of contact elements

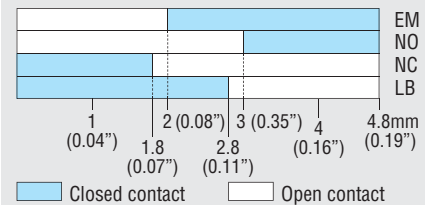


Maximum conductor cross section for screw terminals
1 or 2 2.5mm² or AWG14 cables.

Mechanical and electrical endurance

Operating force: ≤0.5kg / 1.1lb (auxiliary contacts).
Electrical life:

LPX C10	1,000,000 cycles
LPX CF10	1,000,000 cycles
LPX C01	1,000,000 cycles
LPX CF01	1,000,000 cycles
LPX C10A	600,000 cycles
LPX C01D	600,000 cycles.



Ⓢ When using Faston, pitch is 85mm / 3.35in minimum.

Certifications and compliance

Certifications obtained: UL Listed, for USA and Canada (File E93601), as Auxiliary Devices.
Certifications pending at time of catalogue printing: CCC.
Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-5-1, UL508, CSA C22.2 n° 14.

LED integrated lamp-holders steady or flashing light



LPX L...



Order code	Rated auxiliary supply voltage	LED colour	Qty per pkg	Wt
	[V]		n°	[kg]

Steady light.
Protected version.
Supplied without mounting adapter.

LPX LP B3	18-30V AC/DC	Green	10	0.016
LPX LP B4		Red	10	0.016
LPX LP B5		Yellow	10	0.016
LPX LP B6		Blue	10	0.016
LPX LP B8		White	10	0.016
LPX LP E3	85-140VAC	Green	10	0.016
LPX LP E4		Red	10	0.016
LPX LP E5		Yellow	10	0.016
LPX LP E6		Blue	10	0.016
LPX LP E8		White	10	0.016
LPX LP M3	185-265VAC	Green	10	0.016
LPX LP M4		Red	10	0.016
LPX LP M5		Yellow	10	0.016
LPX LP M6		Blue	10	0.016
LPX LP M8		White	10	0.016

Steady light.
Non-protected version.
Supplied without mounting adapter.

LPX LE B3	18-30V AC/DC	Green	10	0.016
LPX LE B4		Red	10	0.016
LPX LE B5		Yellow	10	0.016
LPX LE B6		Blue	10	0.016
LPX LE B8		White	10	0.016
LPX LE E3	85-140V AC/DC	Green	10	0.016
LPX LE E4		Red	10	0.016
LPX LE E5		Yellow	10	0.016
LPX LE E6		Blue	10	0.016
LPX LE E8		White	10	0.016
LPX LE M3	185-265V AC/DC	Green	10	0.016
LPX LE M4		Red	10	0.016
LPX LE M5		Yellow	10	0.016
LPX LE M6		Blue	10	0.016
LPX LE M8		White	10	0.016

Flashing light.
Protected version.
Supplied without mounting adapter.

LPX LF B3	18-30V AC/DC	Green	10	0.016
LPX LF B4		Red	10	0.016
LPX LF B5		Yellow	10	0.016
LPX LF B6		Blue	10	0.016
LPX LF B8		White	10	0.016
LPX LF E3	85-140VAC	Green	10	0.016
LPX LF E4		Red	10	0.016
LPX LF E5		Yellow	10	0.016
LPX LF E6		Blue	10	0.016
LPX LF E8		White	10	0.016
LPX LF M3	185-265VAC	Green	10	0.016
LPX LF M4		Red	10	0.016
LPX LF M5		Yellow	10	0.016
LPX LF M6		Blue	10	0.016
LPX LF M8		White	10	0.016

Operational characteristics

- Rated auxiliary supply voltage for:
 - Protected steady light: 18-30VAC/DC; 85-140VAC; 185-265VAC
 - Non-protected steady light: 18-30VAC/DC; 85-140VAC/DC; 185-265VAC/DC
 - Protected flashing light: 18-30VAC/DC; 85-140VAC; 185-265VAC
- Maximum consumption for:
 - Protected steady light: 17mA (18-30VAC/DC), 20mA (85-140VAC), 17mA (185-265VAC)
 - Non-protected steady light: 11mA (18-30VAC/DC), 5mA (85-140VAC/DC), 3mA (185-265VAC/DC)
 - Protected flashing light: 17mA (18-30VAC/DC), 20mA (85-140VAC), 17mA (185-265VAC)
- Protected version features consist of:
 - Over voltage protection
 - Withstand to vibrations
 - Protection against stray currents in wiring
 - Flickering phenomenon reduction
- Electrical life: 100,000 hours
- Ambient conditions:
 - Operating temperature: -25...+70°C (-25...+60°C for LPX LE...)
 - Storage temperature: -40...+85°C
- Any mounting position is allowed.
- Degree of protection per IEC/EN: IP20
- Maximum tightening torque: 1Nm / 0.74lbf.

Maximum conductor cross section

1 o 2 2.5mm² or AWG12 cables.

Wiring diagram



Certifications and compliance

Certifications obtained: UL listed, for USA and Canada (File E93601), as Auxiliary Devices.
Certifications pending at time of catalogue printing: CCC.
Compliant with standards: IEC/EN 60947-1, IEC/EN 60947-5-1, UL508, CSA C22.2 n° 14.