





**M12 B Type
T-Splitter Connector
Totally Shielded**



Part# B-12TTJ35000-5SH

Product Description:	M12 Male B Type Totally Shielded 2 males, 1 female, 5 pole
Number of contacts:	5 poles
Standard:	IEC 61076-2-101/ IEC 60947-5-2
Housing Color:	Black
Rated Voltage:	50 V AC/DC
Rated Current:	4A
Contact Surface Material:	Nickel + .45um AU Gold Plated
Coupling Nut Material:	ZN AU/Ni
O-Ring:	NBR
Protection Class:	IP 67
Temperature Range:	-25°C to +70°C

ELECTRICAL SCHEME

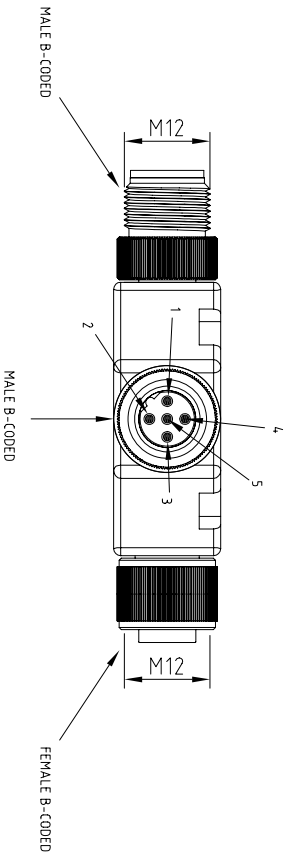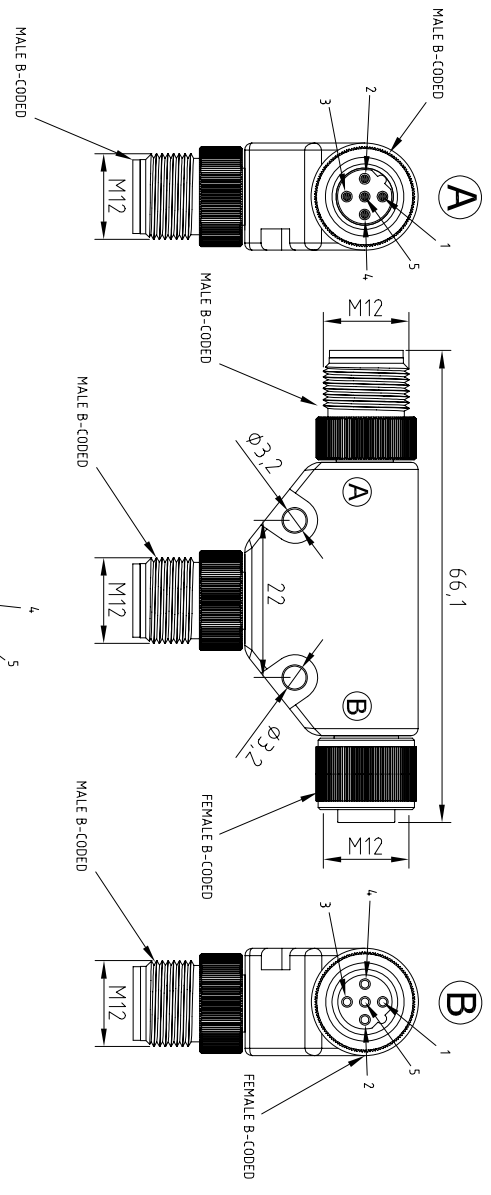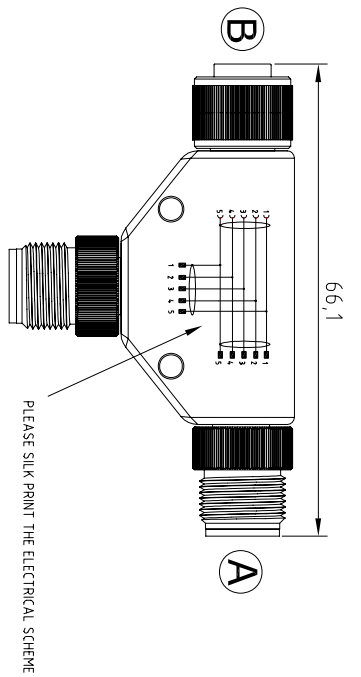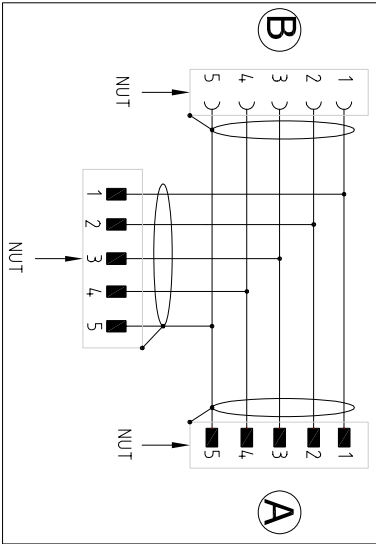

PROFIBUS T CONNECTOR FEATURES	
PRODUCT TYPE	M12 TYPE T-SPLITTER CONNECTOR B-CODED
TYPE OF CONTACT	n°2 MALE/n°1 FEMALE
NUMBER OF CONTACTS CONNECTED	N°5
HOUSING COLOUR	BLACK
HOUSING MATERIAL	NYLON 6+30% GLASS FIBRE
COUPLING NUT MATERIAL	Zn Al/NI
PROTECTION CLASS	IP69K
CIRCUIT TYPE	PARALLEL
SHIELD CONNECTED TO THE NUT AND SHIELD CONNECTED TO PIN N°5	



TOLERANZE	UNITS	ANGOLO	DISTANZARE LIBERANDO CAVINO CONTROLLATO	DATA	SCALA	DISEGNO N.
	UMH			22.09.09	1:1	
DESCRIZIONE M12 TYPE T-SPLITTER CONNECTOR TOTALLY SHIELDED, SPOLES BLACK HOUSING PARALLEL CIRCUIT, WITH N°2 MALE AND N°1 FEMALE B-CODED. SHIELD CONNECTED TO THE NUT/A AND SHIELD CONNECTED TO THE PIN N°5.				TIPO		
				CODICE		

B-12T T J35000-5SH

www.asi-ez.com

877-650-5160 ■ PO BOX 1340, Mechancisburg PA 17055