

NDB3-100

**UL489A & UL1077
100A Frame Rating
1,2 & 3 Pole/Screw Mounting
Black Long Handle, White Marked
On/Off, No Auxiliary Contacts**



One Pole



Two Pole



Three Pole

Features:

- UL489A & UL1077
- 1,2,3 Pole
- Various color rocker and handles
- 24 different current ratings (1-100 AMP)
- ROHS Compliant
- Both AC and DC trip curves

Provide protection for:

- Telecommunications
- Railway locomotive
- Medical Equipment
- UPS Equipment



AC Medium Delay Tripping Curve J4

Rated Current (Amps)	One Pole	Two Pole	Three Pole
1	NDB3-100J41/1LSS1A0	NDB3-100J41/2LSS1A0	NDB3-100J41/3LSS1A0
2	NDB3-100J42/1LSS1A0	NDB3-100J42/2LSS1A0	NDB3-100J42/3LSS1A0
3	NDB3-100J43/1LSS1A0	NDB3-100J43/2LSS1A0	NDB3-100J43/3LSS1A0
4	NDB3-100J44/1LSS1A0	NDB3-100J44/2LSS1A0	NDB3-100J44/3LSS1A0
5	NDB3-100J45/1LSS1A0	NDB3-100J45/2LSS1A0	NDB3-100J45/3LSS1A0
6	NDB3-100J46/1LSS1A0	NDB3-100J46/2LSS1A0	NDB3-100J46/3LSS1A0
8	NDB3-100J48/1LSS1A0	NDB3-100J48/2LSS1A0	NDB3-100J48/3LSS1A0
10	NDB3-100J410/1LSS1A0	NDB3-100J410/2LSS1A0	NDB3-100J410/3LSS1A0
12	NDB3-100J412/1LSS1A0	NDB3-100J412/2LSS1A0	NDB3-100J412/3LSS1A0
15	NDB3-100J415/1LSS1A0	NDB3-100J415/2LSS1A0	NDB3-100J415/3LSS1A0
16	NDB3-100J416/1LSS1A0	NDB3-100J416/2LSS1A0	NDB3-100J416/3LSS1A0
20	NDB3-100J420/1LSS1A0	NDB3-100J420/2LSS1A0	NDB3-100J420/3LSS1A0
24	NDB3-100J424/1LSS1A0	NDB3-100J424/2LSS1A0	NDB3-100J424/3LSS1A0
25	NDB3-100J425/1LSS1A0	NDB3-100J425/2LSS1A0	NDB3-100J425/3LSS1A0
30	NDB3-100J430/1LSS1A0	NDB3-100J430/2LSS1A0	NDB3-100J430/3LSS1A0
35	NDB3-100J435/1LSS1A0	NDB3-100J435/2LSS1A0	NDB3-100J435/3LSS1A0
40	NDB3-100J440/1LSS1A0	NDB3-100J440/2LSS1A0	NDB3-100J440/3LSS1A0
45	NDB3-100J445/1LSS1A0	NDB3-100J445/2LSS1A0	NDB3-100J445/3LSS1A0
50	NDB3-100J450/1LSS1A0	NDB3-100J450/2LSS1A0	NDB3-100J450/3LSS1A0
60	NDB3-100J460/1LSS1A0	NDB3-100J460/2LSS1A0	NDB3-100J460/3LSS1A0
70	NDB3-100J470/1LSS1A0	NDB3-100J470/2LSS1A0	NDB3-100J470/3LSS1A0
80	NDB3-100J480/1LSS1A0	NDB3-100J480/2LSS1A0	NDB3-100J480/3LSS1A0
90	NDB3-100J490/1LSS1A0	NDB3-100J490/2LSS1A0	NDB3-100J490/3LSS1A0
100	NDB3-100J4100/1LSS1A0	NDB3-100J4100/2LSS1A0	NDB3-100J4100/3LSS1A0

Specifications

Number of Poles: 1, 2 & 3
 Rated Voltage: AC 230/400
 DC 80
 Min. Amp Rating: 1A
 Max. Amp Rating: 100A
 Interrupting Capacity: 4kA
 Mechanical Life: 10,000
 Operations
 Operating Temp. Range: -40°C - 85°C
 Agency Approvals: UL489A, UL1077, CE,
 TUV, ROHS

AC Medium delay J4

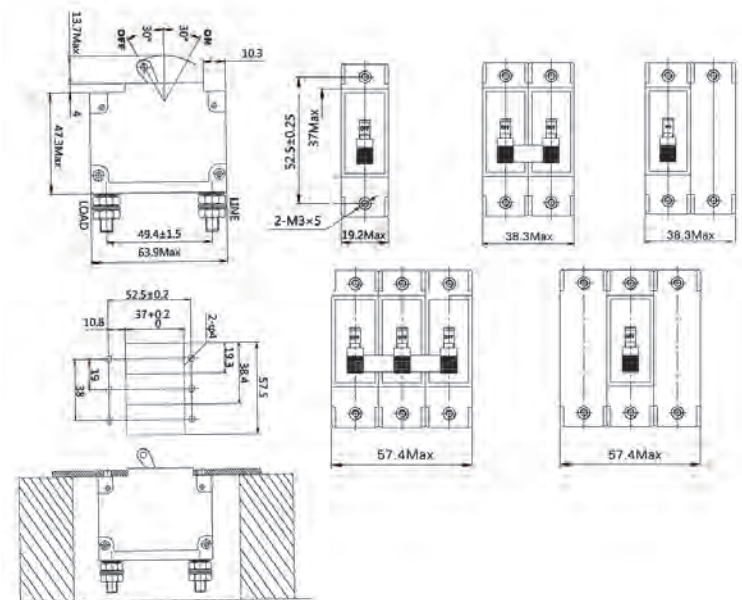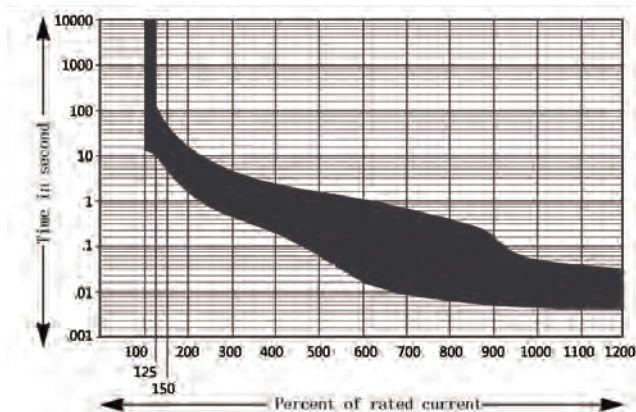

Visit www.asi-ez.com