

MAXIbrass® CABLE GLANDS

Nickel Plated Brass

2900




Material:
 NICKEL PLATED BRASS
 (CuZn 40 Pb 3)
 Sealing-ring: NEOPRENE®
 Cable grip insert:
 POLYAMIDE PA6.6
 O-Ring: NITRILE 70 sh A
 (factory fitted)
 Protection: IP 68
 Temperature range:
 -25°C to +100°C (continuous)



MAXIbrass® standard

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Ref. Nickel Plated Brass	P	Ring Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity
2900.M12N	M12X1,5	12,5	3 - 7	16	18	6,5	16-20	100
2900.M16N	M16X1,5	16,5	4,5-10	20	23	7,0	20-25	100
2900.M20N	M20X1,5	20,5	7 -13	24	27	8,0	20-27	50
2900.M25N	M25X1,5	25,5	10 -17	29	32	8,0	24-30	50
2900.M32N	M32X1,5	32,5	11 -21	36	40	9,0	27-34	25
2900.M40N	M40X1,5	40,5	19 -28	45	50	9,0	34-42	10
2900.M50N	M50X1,5	50,5	26 -35	54	60	10,0	35-43	8
2900.M63N	M63X1,5	63,5	34 -45	67	74	15,0	40-52	5

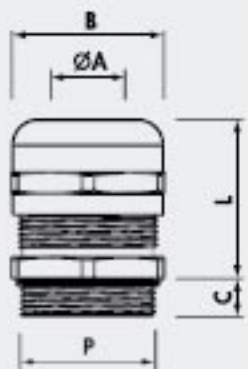

MAXIbrass® reduced cable entry

Metric thread M 1.5 pitch CEI EN 60423 CEI EN 50262

Ref. Nickel Plated Brass	P	Ring Hole Ø (mm)	Ø A min-max (mm)	B Spanner (mm)	E (mm)	C (mm)	L min-max (mm)	Quantity
2910.M12N	M12X1,5	12,5	1 - 5	16	18	6,5	16-20	100
2910.M16N	M16X1,5	16,5	2,5- 7	20	23	7,0	20-25	100
2910.M20N	M20X1,5	20,5	5 -10	24	27	8,0	20-27	50
2910.M25N	M25X1,5	25,5	6 -13	29	32	8,0	24-30	50
2910.M32N	M32X1,5	32,5	7 -14	36	40	9,0	27-34	25
2910.M40N	M40X1,5	40,5	13 -23	45	50	9,0	34-42	10
2910.M50N	M50X1,5	50,5	20 -29	54	60	10,0	35-43	8
2910.M63N	M63X1,5	63,5	27 -39	67	74	15,0	40-52	5



www.asi-ez.com

877-650-5160

PO BOX 1340 Mechanicsburg PA 17055