

Miniature Circuit Breakers - QL Series





| | Single Pole | | Double Pole | | Three Pole | |
|--------------|-------------|----------|-------------|----------|-------------|----------|
| Rate Current | Part# | Pkg Size | Part# | Pkg Size | Part# | Pkg Size |
| .5A | QL113DMKM.5 | 12 | | | | |
| 1A | QL113DMKM01 | 12 | QL213DMKM01 | 6 | QL313DMKM01 | 4 |
| 2A | QL113DMKM02 | 12 | QL213DMKM02 | 6 | QL313DMKM02 | 4 |
| 3A | QL113DMKM03 | 12 | QL213DMKM03 | 6 | QL313DMKM03 | 4 |
| 4A | QL113DMKM04 | 12 | QL213DMKM04 | 6 | QL313DMKM04 | 4 |
| 5A | QL113DMKM05 | 12 | QL213DMKM05 | 6 | QL313DMKM05 | 4 |
| 6A | QL113DMKM06 | 12 | QL213DMKM06 | 6 | QL313DMKM06 | 4 |
| 7A | QL113DMKM07 | 12 | QL213DMKM07 | 6 | QL313DMKM07 | 4 |
| 8A | QL113DMKM08 | 12 | QL213DMKM08 | 6 | QL313DMKM08 | 4 |
| 9A | QL113DMKM09 | 12 | QL213DMKM09 | 6 | QL313DMKM09 | 4 |
| 10A | QL113DMKM10 | 12 | QL213DMKM10 | 6 | QL313DMKM10 | 4 |
| 15A | QL113DMKM15 | 12 | QL213DMKM15 | 6 | QL313DMKM15 | 4 |
| 20A | QL113DMKM20 | 12 | QL213DMKM20 | 6 | QL313DMKM20 | 4 |
| 25A | QL113DMKM25 | 12 | QL213DMKM25 | 6 | QL313DMKM25 | 4 |

Technical Data:

Number of Poles: 1,2,3
 Max Voltage: 240V, 50/60 Hz
 Min. Amp Rating: .1 Amp
 Max Amp Rating: 25 Amp
 Interrupting Capacity: 10kA (1pole) 5kA(2,3pole)
 Dielectric Strength: 100 Megaohm at 500V DC minimum
 Operating Temp Range: -40°C to +65°C

Features:

- UL489 Listed
- Rated from 1 to 25 amps
- Compact 13mm width
- Shock Proof Connections
- Standard 35mm
DIN Rail Mounting

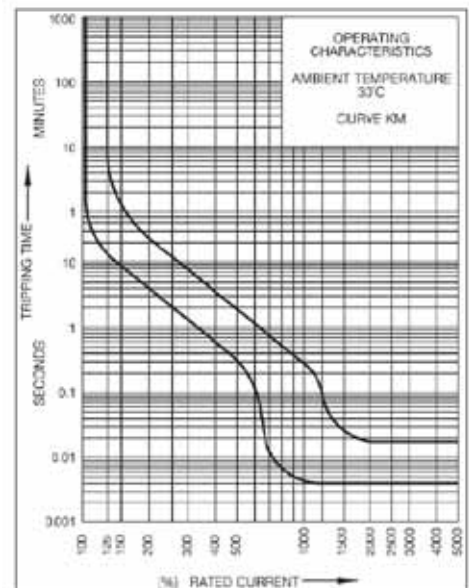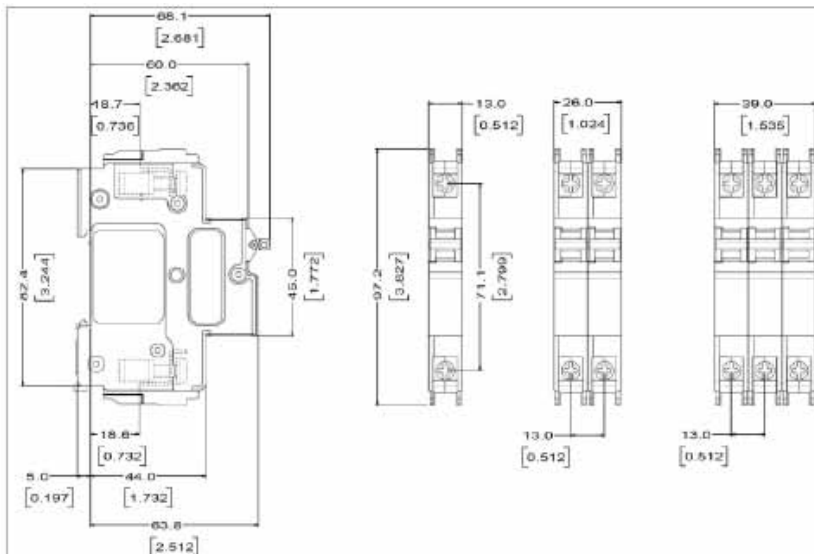

To locate additional product specifications and technical drawings go to www.asi-ez.com