



Fuse Holder Terminal Blocks

The fuse holder terminal blocks are available in styles that will handle the standard control circuit 5 x 20mm and 1/2" x 1/8" fuses. Each fuse block is self-contained with a lever that holds, inserts and extracts the fuse from the circuit. Fuse holder terminal blocks are available with and without blown fuse indication. The visual indication that is provided when the fuse blows is an ideal method of simplifying troubleshooting and reducing downtime. The fuse holder terminal block is fully insulated, thereby providing shock hazard protection.

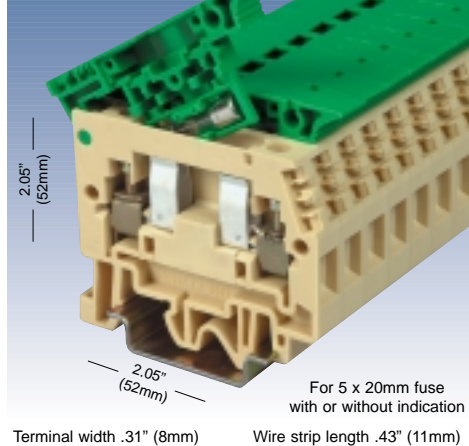

SFR.4

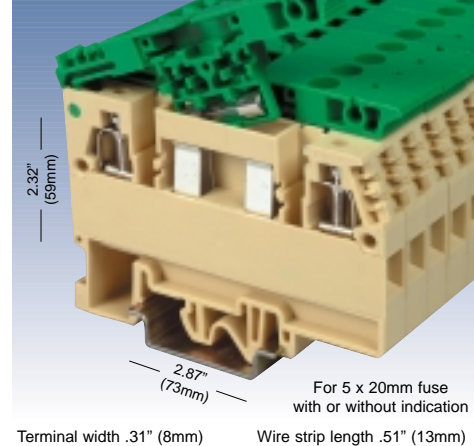

SFO.4

SPECIFICATIONS

Connection Data
 1059
 No. 22-2, No. 158
 IEC 947-7-1

ORDERING INFORMATION

Fuse holder terminal block,
 standard without indication Beige
 standard with 24 VDC Beige
 standard with 115 VAC Beige
 standard with 230 VAC Beige
 (Ex)i version Blue

ACCESSORIES

End cover, width .06" (1.5mm)
 Beige
 Blue

Internal bridge assembly kit, 2 position

External bridge,

Multiple circuit bridge bar, (250mm)
 2 through 45 circuits based on length, used with bridge kit

Circuit bridge kit,
 consisting of screw and spacer, used with bridge bar

Partition plate,
 White
 Red
 Green

Test socket, for circuit testing with test plug (SDD)

Test plug, for circuit testing with test socket (PSD)

Marking system,
 blank marker
 printed marker
 custom marker
 universal marker

End stop, width .31" (8mm)
 universal
 35mm rail only

Mounting rail, DIN (2 meter length)
 non-slotted symmetrical 35mm x 7.5mm
 slotted symmetrical 35mm x 7.5mm
 non-slotted symmetrical 35mm x 15mm
 slotted symmetrical 35mm x 15mm

WIRE RANGE CURRENT (A) VOLTAGE (V)

24 - 10 AWG
 20 - 12 AWG 6.3 600
 —
 0.5 - 4mm 6.3 800

TYPE CATALOG No. Pcs/PKG

SFR.4 SF900 70
 SFR.4/C24 SF924 70
 SFR.4/C115 SF915 70
 SFR.4/C230 SF923 70
 SFR.4(Ex)i SF800 70

TYPE CATALOG No. Pcs/PKG

SFR/PT SF701 25
 SFR/PT(Ex)i SF801 25

—

—

—

—

DFU/7/B DU07B 25
 DFU/7/R DU07R 25
 DFU/7/V DU07V 25

PSD/J PD014 50

SDD/1 DD001 50

SNZ/8/00 SN004 60
 SNZ/8... SN4... 60
 CM CM... 5
 CNU/8/030 NU008 5

BTU BT005 25
 BT/3 BT003 25

PR/3/AC PR003 1
 PR/3/AS PR005 1
 PR/3/PP PR007 1
 PR/3/PA PR006 1

WIRE RANGE CURRENT (A) VOLTAGE (V)

20 - 10 AWG
 20 - 12 AWG 6.3 600
 —
 0.5 - 4mm 6.3 800

TYPE CATALOG No. Pcs/PKG

SFO.4 SF400 100
 SFO.4/C24 SF824 100
 SFO.4/C115 SF815 100
 SFO.4/C230 SF823 100
 SFO.4(Ex)i SF600 100

TYPE CATALOG No. Pcs/PKG

SFO/PT SF401 25
 SFO/PT(Ex)i SF601 25

POF/20 POF20 25

—

PMP/20 PMP20 8

CPM/20 CPM20 25

DFU/7/B DU07B 25
 DFU/7/R DU07R 25
 DFU/7/V DU07V 25

PSD/J PD014 50

SDD/1 DD001 50

SNZ/8/00 SN004 60
 SNZ/8... SN4... 60
 CM CM... 5
 CNU/8/030 NU008 5

BTU BT005 25
 BT/3 BT003 25

PR/3/AC PR003 1
 PR/3/AS PR005 1
 PR/3/PP PR007 1
 PR/3/PA PR006 1