



Diode-holder modules with common terminal CDM series



NOTES

BLOCK DIAGRAM

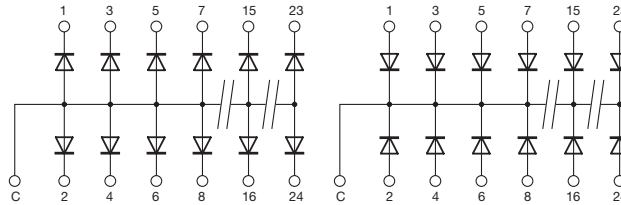

VERSIONS	DIMENSIONS (A x B x C)	common anode		common cathode	
		Item	Cat. No.	Item	Cat. No.
8 diodes	45x65x93 (1.77x2.56x3.66 in)	CDM08AC	XCDM08AC	CDM08CC	XCDM08CC
16 diodes	92x65x93 (3.62x2.56x3.66 in)	CDM16AC	XCDM16AC	CDM16CC	XCDM16CC
24 diodes	137x65x93 (5.39x2.56x3.66 in)	CDM24AC	XCDM24AC	CDM24CC	XCDM24CC

GENERAL TECHNICAL DATA

Rated voltage	0...230 V ±10%
Rated current	1 A max.
Operating temperature	1N4007
Diode type	1000 V
Repetitive peak reverse voltage	-20...+60°C
Protection degree	IP00 IEC529; EN60529
Reference Standard	IEC 664-1; DIN VDE 0110.1
Pollution degree	2
Overvoltage category	II
Housing material	polyamide UL94V-0
Connection terminal blocks	2.5 mm ² fixed screw type (AWG 14)
Mounting information	vertical on rail adjacent without gap

MOUNTING ACCESSORIES

Mounting rail type according to IEC60715/TH35	PR/3/AC - PR/3/AS
Mounting rail type according to IEC60715/G32	PR/DIN/AC - PR/DIN/AS - PR/DIN/AL
Jumper bridge	black