


The IMSR solid state relay socket modules from **ASI** provide an easy means to add any standard 0.45" wide solid state relay to an industrial control system.

The IMSR is available in 1 to 16 channel versions. Removable pin jumpers are used to with multi-channel versions to jumper the Vcc logic voltage and logic ground across multiple channels.

Utilizing these jumpers can eliminate the need to connect logic supply voltage and ground wires to each channel resulting in substantial labor savings. The jumpers can also be removed for applications requiring isolated channels. Modified and custom versions are also available, contact **ASI** to discuss your needs.

For modules without indication, contact **ASI** for type/catalog numbers.

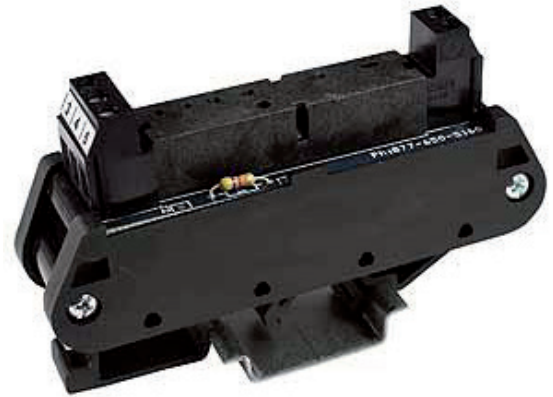

| Type | Catalog No. | No. Channels | Length (inch/mm) |
|---------|-------------|--------------|------------------|
| IMSRP01 | 13000 | 1 | 0.90/22.9 |
| IMSRP02 | 13001 | 2 | 1.71/43.4 |
| IMSRP03 | 13002 | 3 | 2.52/64.0 |
| IMSRP04 | 13003 | 4 | 3.33/84.6 |
| IMSRP05 | 13004 | 5 | 4.14/105.2 |
| IMSRP06 | 13005 | 6 | 4.95/125.7 |
| IMSRP07 | 13006 | 7 | 5.76/146.3 |
| IMSRP08 | 13007 | 8 | 6.57/166.9 |
| IMSRP09 | 13008 | 9 | 7.38/187.5 |
| IMSRP10 | 13009 | 10 | 8.19/208.0 |
| IMSRP11 | 13010 | 11 | 9.00/228.6 |
| IMSRP12 | 13011 | 12 | 9.81/249.2 |
| IMSRP13 | 13012 | 13 | 10.62/269.8 |
| IMSRP14 | 13013 | 14 | 11.43/290.3 |
| IMSRP15 | 13014 | 15 | 12.24/310.9 |
| IMSRP16 | 13015 | 16 | 13.05/331.5 |

IMSR
TYPICAL SCHEMATIC

