


## Single-phase switching power supply 120-230 Vac output power 240 W


- Single-phase input 120 and 230 Vac
- Short circuit, overload, over temperature, input and output overvoltage protections
- High inrush current to guarantee downstream overcurrent protections selectivity and to start-up heavy loads
- Failure contact for Uout -10%
- Compact dimensions
- Suitable for applications in SELV and PELV circuits

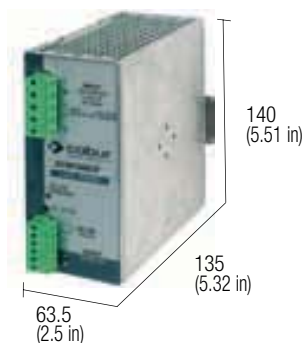

### NOTES

- The depth dimension includes the terminal blocks and the DIN clamp.
- (2) Double input selectable with external jumper, DC supply allow only between 300 and 345 Vdc
- (3) Over 45°C (113°F) apply a derating: -0.17 A/°C for version C, CP and CPH; -0.27 A/°C for version B; -0.08 A/°C for version DP;
- (4) For this peak current, the output voltage does not drop more than 10% of the nominal value, but the current value, provided by the power supply also depends on the total line resistance.
- (5) Only on version CSF240CP, for orders, adds the letter H to the code (XCSE240CPH)

### BLOCK DIAGRAM

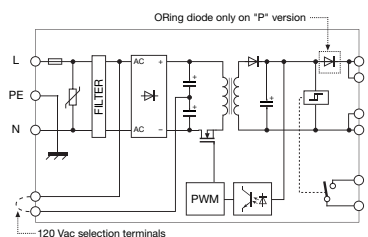

Special version for DC motors

VERSIONS	Cod. XCSF240C	Cod. XCSF240CP	Cod. XCSF240B	XCSF240DP	
Output 24 Vdc 10 A	CSF240C				
Output 24 Vdc 10 A redundant version		CSF240CP			
Output 12...15 Vdc 16 A			CSF240B		
Output 48 Vdc 5 A redundant version				CSF240DP	
INPUT TECHNICAL DATA	<b>120 - 230 Vac</b> (range 90...132 Vac / 185...264 Vac / 300...345 Vdc) (2)				
Frequency	47...63 Hz				
Current @ nominal Iout (Uin 120 / 230 Vac)	3.5 A / 1.8 A ± 10%				
Inrush peak current	< 35 A				
Power factor	> 0.6				
Internal protection fuse	T 6.3 A replaceable				
External protection on AC line	circuit breaker: 6 A C characteristic - fuse: T 6.3 A				
OUTPUT TECHNICAL DATA	<b>24 Vdc</b> 23...27.5 Vdc <b>10 A @ 45°C</b> (3) 15 A for >30 s with Uout >90% Un (4)	<b>12...15 Vdc</b> 12...15 Vdc <b>16 A @ 45°C</b> (3) 24 A for >30 s with Uout >90% Un (4)	<b>48 Vdc</b> 45...55 Vdc <b>5 A @ 45°C</b> (3) 7.5 A for >30 s with Uout >90% Un (4)	<b>12...15 Vdc</b> 12...15 Vdc <b>16 A @ 45°C</b> (3) 24 A for >30 s with Uout >90% Un (4)	<b>48 Vdc</b> 45...55 Vdc <b>5 A @ 45°C</b> (3) 7.5 A for >30 s with Uout >90% Un (4)
Short circuit peak current	>25 A for 400 ms (4)				
Load regulation	< 1%				
Ripple @ nominal ratings	≤ 50 mVpp				
Hold up time @ In (Uin 120 / 230 Vac)	>30 ms / >60 ms				
Overload / short circuit protections	hiccup at the overload limit with auto reset / over temperature protection				
Status display	"DC OK" green LED / "DC OK" alarm contact/ "Overload" red LED				
Alarm contact threshold	21.6 Vdc	10.8 Vdc	10.8 Vdc	43.2 Vdc	
Parallel connection	possible	possible	possible	possible	
Redundant parallel connection	possible with external ORing diode	factory provided with internal ORing diode	possible with external ORing diode	factory provided with internal ORing diode	
GENERAL TECHNICAL DATA	<b>Efficiency (Uin 120 / 230 Vac)</b> >88% / >90%				
Dissipated power (Uin 120 / 230 Vac)	32 W / 27 W				
Operating temperature range	-20...+60°C, with derating over 45°C / over temperature protection (3)				
Input/output isolation	3 kVac / 60 s SELV output				
Input/ground isolation	1.5 kVac / 60 s				
Output/ground isolation	0.5 kVac / 60 s				
Standard/approvals	EN50178, EN61558, EN60950, IEC950, UL508, UL60950				
EMC Standards	EN61000-6-2, EN61000-6-4, EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-11				
MTBF @ 25°C @ nominal ratings	>500'000 h acc. to SN 29500 / >150'000 h acc. to MIL Std. HDBK 217F				
Overvoltage category/Pollution degree	II / 3				
Protection degree	IP 20 IEC 529, EN60529				
Connection terminal	2.5 mm² pluggable screw type				
Housing material	aluminium				
Approx. weight	920 g (32.48 oz)				
Mounting information	vertical on rail, allow 10 mm spacing between adjacent components				
MOUNTING ACCESSORIES	<b>PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB</b>				
Mounting rail type according to IEC60715/TH35-7.5					
Mounting rail type according to IEC60715/G32					